FOX LUX
EMERGENCY LIGHTING

REM10 EMERGENCY LIGHTING REMOTE CONTROL

Thank you for purchasing our REM10 Remote Control. Our products have been designed according to the relevant standards and if installed and maintained correctly will provide a long service life.


BS EN 60598-1 / BS EN 60598-2-22 / BS EN 50172 / BS EN 1838 / BS EN 62034 / ISO 7010 / ISO 3864

- This product should only be used by suitably qualified personnel.
- This product can be used to send commands to compatible Fox Lux self-test emergency luminaires and conversion kits.*
- Please see below which functions are available for each version.
- It requires two AAA batteries.

*REM10 remote control adds new features to self-test emergency luminaires and it is an optional tool for those responsible for emergency lighting installations. Note that self-test emergency luminaires work independently from the remote control.


Part number	Description	Operating temperature	Net weight
REM10	Remote Control	0 - 40°C	0.06 kg

1: Batteries

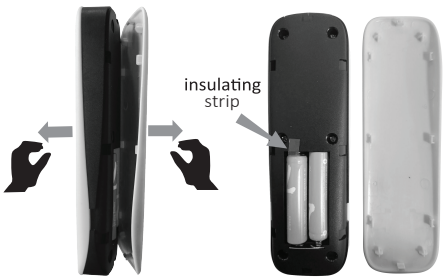

REM10 is requires two AAA batteries. Please remove the battery insulating pull tab to start using.

2: Infrared range

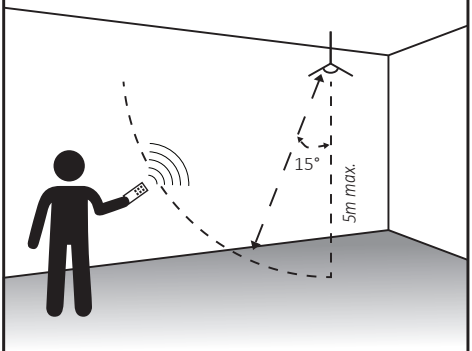


Position yourself as close as possible to the luminaire and point the remote control towards the luminaire when pressing the buttons.

Ensure this product is disposed responsibly according to WEEE directive 2002/96/EC

t | +44(0)1543 396400 | e | hello@fox-lux.co.uk | w | www.fox-lux.co.uk

REM10 Remote Control

Functions:

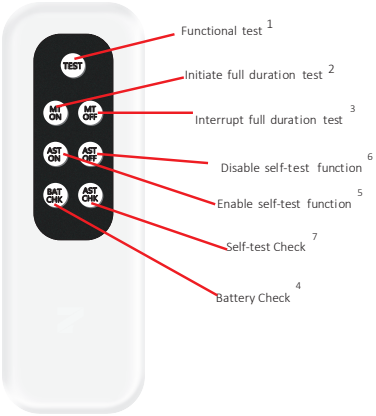

FUNCTIONS FOR "self-test" VERSIONS:

1. Press button TEST to carry out a "Functional Test"
2. Press button "MT ON" to initiate a "Full Duration Test".*
3. Press button "MT OFF" to interrupt "Full Duration Test".
4. Press button "BAT CHK" to check status of battery's health.**

* Note that when the "Full Duration Test" is completed the batteries require up to 8 hours to be re-charged again.

** Note that battery status is recorded and updated after full duration test is completed .

Flashing Codes for Self-test Check (Function 7)

Self-Test Status check

	Flashing Code	Self-test status
GREEN LED Indicator	2 blinks ◎ ◎	self-test is disabled
	1 blink ◎	self-test is enabled

◎ Slow flash = 0.5Hz (about two seconds per flash)

Flashing Code for Battery Health Check (Function 4)

Battery health status check

	Flashing Code	Battery Status (emergency lighting duration)	Approximate Capacity Reserve
GREEN/RED LED Indicator	4 flashes ◎ ◎ ◎ ◎	Battery not tested yet	-
	1 flash ◎	duration > 3hr 30min	Extra capacity > 16%
	2 flashes ◎ ◎	3hr 15min < duration < 3hr 30min	8% < Extra capacity < 16%
	3 flashes ◎ ◎ ◎	3hr < EM duration < 3hr 15min	0< Extra capacity < 8%

t |+44(0)1543 396400 |e|hello@fox-lux.co.uk| w |www.fox-lux.co.uk
Registered Office: Alex House 260/8 Chapel Street, Salford, Manchester, M3 5JZ
Company Registration No. 11821284 VAT RegistrationNo. 320 9921 12

Issue V1
5/1/2020