



# PLASTERER'S A-FRAME

## PORTABLE SITE LIGHTING



Our Plasterer's A-Frame is a handy addition to the Weatherguard Site range. This portable fitting is easy to relocate and features a useful cable storage facility.

### Features


- Lightweight and easy to relocate on site
- Strong, stable frame
- Includes 2x110V power outlets for connecting more fittings or power tools
- Supplied with 5m cable and pre-wired plug



### Specification



<b>Material:</b>	Body & Diffuser: Polycarbonate Frame: Steel
<b>Colour Temperature:</b>	4000K
<b>Colour Finish:</b>	Yellow
<b>CRI:</b>	Ra>80
<b>LED Lifetime:</b>	L80B50 30,000 Hrs
<b>IP Rating:</b>	IP65
<b>IK Rating:</b>	IK07
<b>Working Temperature:</b>	-20°C to 40°C (Emergency version 0°C to 40°C)
<b>Power Factor:</b>	0.9
<b>Emergency Battery Type:</b>	Ni-Cd
<b>Electrical Class:</b>	Class I
<b>Guarantee:</b>	3 Years (1 year for emergency batteries)

### Dimensions

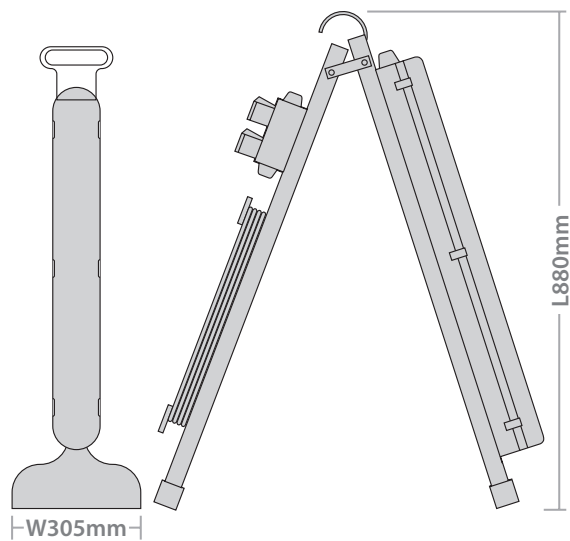

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Barcodes	Weight (kg)
WGS220Y/AF	Weatherguard Site A-Frame	20W	2000 lm	-	100 lm/W	5055807622769	3.0
WGS220Y-E/AF	Weatherguard Site A-Frame c/w 3Hr EM	20W	2000 lm	180 lm	100 lm/W	5055807622776	3.3

Light Distribution Curve

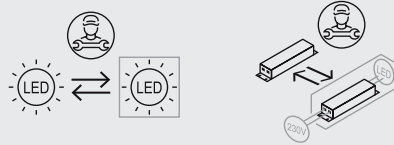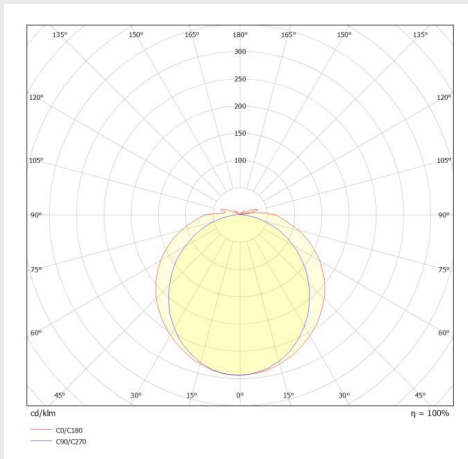

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)