
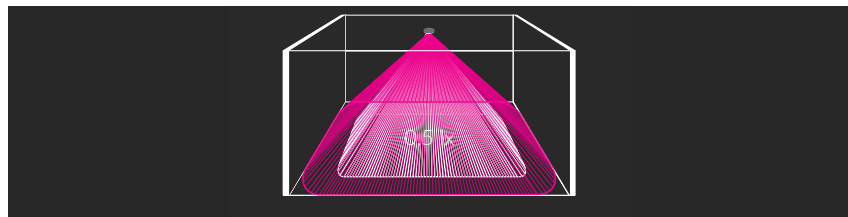


Application	anti-panic lighting escape route lighting
Light source	LED 
Testing for self-contained	non-addressable: ST – for bottom test non-addressable: AT – auto-test / self-test addressable: DATA – with addressable module for DATA system addressable: DALI – with addressable module for DALI systems
Testing for central battery	non-addressable: CB1 – without addressable module addressable : CB4 – with addressable module
Power supply	210÷250 V AC 50÷60 Hz 186÷254 V DC
Protection degree	IP20
Insulation class	I
Temperature range	ST, AT, DATA, DALI: $t_a +10^{\circ}\text{C} \div +35^{\circ}\text{C}$ CB: $t_a -15^{\circ}\text{C} \div +55^{\circ}\text{C}$ CBA: $t_a -10^{\circ}\text{C} \div +40^{\circ}\text{C}$
Glow wire test	850°C
Colour	<input type="checkbox"/> - stainless steel <input checked="" type="checkbox"/> RAL 9003 <input type="checkbox"/> RAL 9006 <input type="checkbox"/> RAL 9005 - black steel
Material	housing: stainless steel (polished/brushed) or RAL 9003 / RAL 9005 / RAL 9006 powder coated black steel

Model	Mode	Time	Battery	Testing
PRIMO C S1	M / NM	1 / 3 h	LiFePO4	ST / AT / DATA / DALI
PRIMO C S1H	M / NM	1 / 3 h	LiFePO4	ST / AT / DATA / DALI
PRIMO C S1	-	-	-	CB, CBA
PRIMO C S1H	-	-	-	CB, CBA



Model	Mode	Time	Battery	Testing
PRIMO C C1	M / NM	1 / 3 h	LiFePO4	ST / AT / DATA / DALI
PRIMO C C1H	M / NM	1 / 3 h	LiFePO4	ST / AT / DATA / DALI
PRIMO C C1	-	-	-	CB, CBA
PRIMO C C1H	-	-	-	CB, CBA

