



VANGUARD SITE

110V EMERGENCY BULKHEAD



Vanguard Site delivers safe site illumination in the event of a power failure. Featuring a sleek, shallow profile and carefully designed lens for improved spacings, Vanguard Site also has configurable maintained or non-maintained operation and features a hinged gear tray for easy and rapid installation.



Features

- Hinged gear tray for quick and easy installation
- Selectable maintained or non-maintained operation
- Supplied with self adhesive exit legend kit

Specification

Material:	Body: ABS Lens: Polycarbonate
Colour Temperature:	6500K
Colour Finish:	Yellow 1355C
LED Lifetime:	L70B50 54,000 Hrs
IP Rating:	IP65
IK Rating:	IK06
Working Temperature:	0°C to 45°C
Electrical Class:	Class II
Emergency Battery Type:	LiFePO4
Guarantee:	5 Years (Batteries 2 Years)

Dimensions

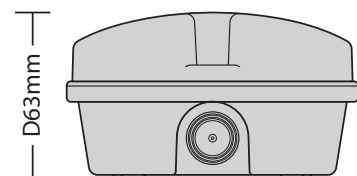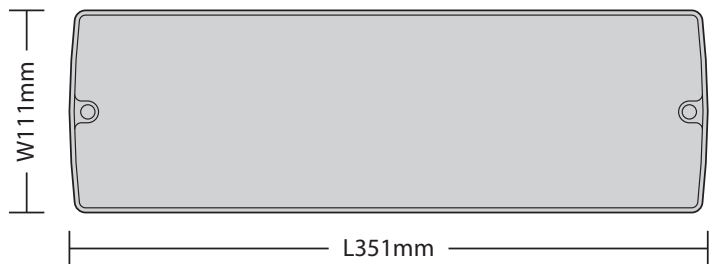

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Net Weight	Barcode
VANS/3Y	Vanguard Site 110V M/NM Bulkhead	3W	150 lm	150 lm	0.49	5055807624411





EXIT LEGEND KIT

Spacing Tables

Open Area				
Mount Height (m)	Open Area 0.5 Lux min (m)			
Self Contained				
2.5	2.6	6.7	4.2	10.3
2.8	2.3	6.9	4.4	11.0
3.0	2.4	7.0	4.5	11.4
4.0	2.1	6.7	4.7	12.6
5.0	0.9	6.3	4.8	13.0

Escape Route		
Mount Height (m)	Escape Route 1 Lux min (m)	
Self Contained		
2.5	1.6	4.9
2.8	1.5	4.69
3.0	1.3	4.69
4.0	-	4.1

Light Distribution Curve

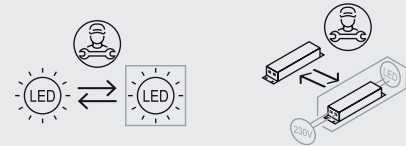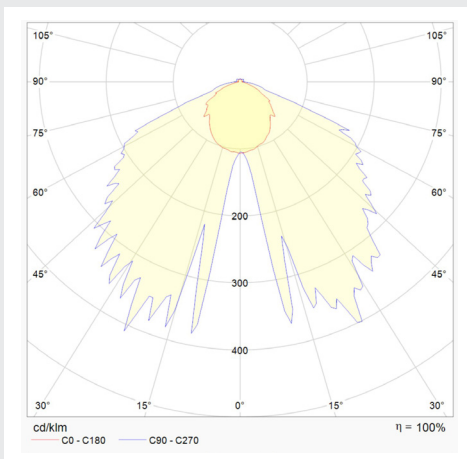

www.redarrowelectrical.co.uk