



GLOBE LIGHT

360° WORKSPACE LIGHTING



For ultimate flexibility, our Globe Light is the number one choice. Featuring 360° light distribution, the unit can be free standing, tripod mounted or suspended using the built-in hook. An emergency version offers complete peace of mind.

Features


- Lightweight and portable
- Efficient 360° light distribution
- Emergency option, switchable to prevent discharge during storage
- Built-in hook for suspension mounting
- Adjustable tripod available to order separately



Specification

Material:	ABS + Polycarbonate
Colour Temperature:	6500K
Colour Finish:	Yellow
CRI	Ra>80
LED Lifetime:	L70B50 35,000 Hrs
IP Rating:	IP54
IK Rating:	IK07
Working Temperature:	-20°C to 40°C (Emergency version 0°C to 40°C)
Power Factor	>0.9
Electrical Class:	Class I
Emergency Battery Type:	Ni-Cd
Guarantee:	2 Years


Dimensions

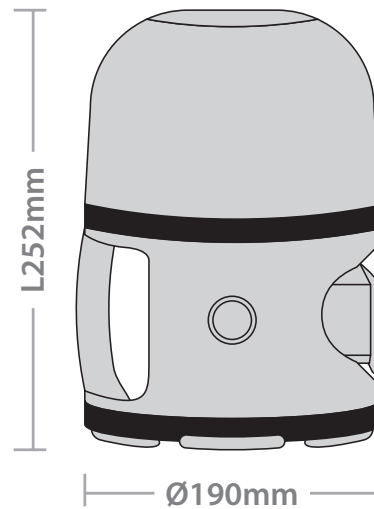

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Net Weight	Barcodes
GLS30YPW	Globe Light c/w 5m cable + 16A plug/socket	30W	2600 lm	-	86 lm/W	1.86	5055807620451
GLE30YPW	Globe Light Emergency c/w 5m cable + 16A plug/socket	30W	2600 lm	350 lm	86 lm/W	2.08	5055807620444
GLTYPW	Adjustable tripod for globe light					2.5	5055807620468



Light Distribution Curve

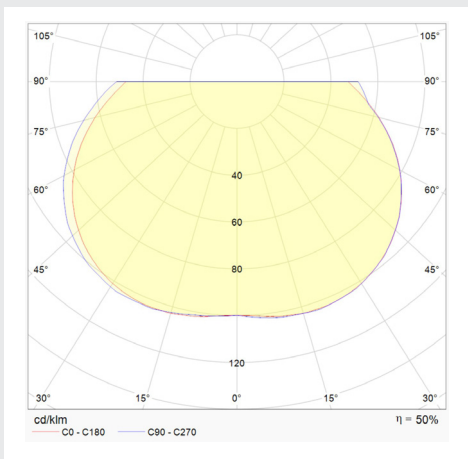

www.redarrowelectrical.co.uk