



BE3FR

FULLY RECESSED BLADE EMERGENCY EXIT SIGN

DESCRIPTION

The BLE BE3FR is a fully recessed emergency exit sign with a blade legend. It comes in LED or 8 Watt fluorescent models, and features dual circuit technology, allowing its use for maintained and non-maintained operation.

Suitable for internal installations (IP20 protection rated), the BE3FR is available in white, brass, chrome or brushed chrome finishes. The fitting is supplied with a down arrow legend as standard. Also available as a 'self-test' fitting (optional extra) and with left/right and up legends (optional extra).



FEATURES

- LED or 8-Watt Blade EXit Sign
- Fully Recessed Design
- Charge Healthy LED Indicator
- Available with a Choice of Legend Direction
- UK Manufactured

OPTIONS

- LED or Fluorescent
- Choice of White, Brass, Chrome or Brushed Chrome Bezel
- Choice of Legend Direction (Down,Up, Left/Right)

SPECIFICATIONS

- LED or 8-Watt Fluorescent Tube
- IP20 Protection Rating
- 36 Metre Viewing Distance
- 3-Hour Emergency Duration
- Maintained Operation - Dual Circuit
- Metal Ceiling Box Assembly
- Tested to BS EN 60598-2-22

APPLICATIONS


- Stairwells
- Retail
- Corridors
- Office Areas
- Commercial Buildings
- Store Rooms

Further specification and pricing details contact 01246 432325 or visit www.blelighting.co.uk

TECHNICAL SPECIFICATION: BE3FR BLADE EMERGENCY EXIT SIGN

DIMENSIONS

A 310mm X B 158mm x C 177mm

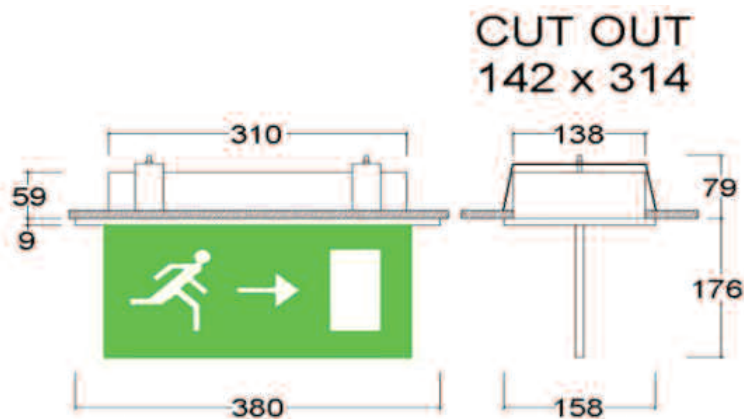

Product Specification

Product Name	BE3FR Fully Recessed Blade Emergency Exit Sign					
Product Code	B3/T5/LED/M3			B3/M3		
Bezel	White BER/W	Brass BER/B	Chrome BER/C	White BER/W	Brass BER/B	Chrome BER/C
Legend	Down Arrow BE3/LGD/E	Left/Right Arrow BE3/LGLR/E	Up Arrow BE3/LGU/E	Down Arrow BE3/LGD/E	Left/Right Arrow BE3/LGLR/E	Up Arrow BE3/LGU/E
Input Voltage	230 Volt AC +/- 10%					
Input Frequency	50Hz					
Power Consumption	< 3.0W			10.2W		
IP Rating	IP20					
Light Source	1 x T5 LED 300mm Coolwhite Tube			1 x 8-Watt 300mm Coolwhite Fluorescent Tube		
Viewing Distance	36 Metres					
Operating Temperature	10°C - 25°C					
Emergency Duration	3 Hours					
Self Test	No (Optional Extra)					
Battery Type	3.6 Volt SC200 mA Nickel Cadmium			2.4 Volt 4Ah Nickel Cadmium		
Charge Current	160mA			320mA		
Discharge Current	500mA			1.0A		
Recharge Time	24 Hours (14 Hours for 1 Hour duration)					
Weight	2.2kg					



BLE Lighting & Power Limited, Church Street, Eckington, S21 4BH
 Tel: 01246 432325 Fax: 01246 432324 Email: sales@blelighting.co.uk

www.blelighting.co.uk