



ITECH M2 302 M ST

TM-IT.M2STM360W




PARAMETERS

Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Insulation class	2
Luminous flux	270 lm
Battery	LiFePO4/C 6.4V 1.5Ah



PHOTOMETRY [m]

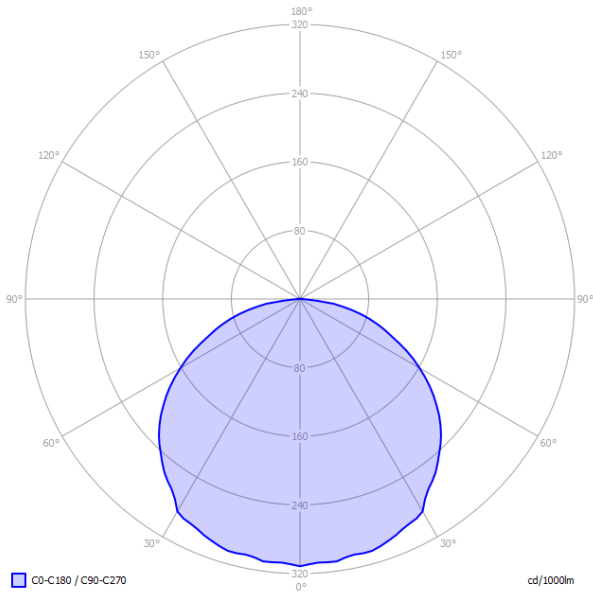

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

4,0
4,2
4,5
4,7
4,9
4,8
4,8
4,7
4,5

Distance fitting - fitting

9,3
10,5
12,0
13,5
14,4
15,0
15,7
16,0
16,2





ITECH M5 305 M ST

TM-IT.M5STM360W




PARAMETERS

Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Insulation class	2
Luminous flux	524 lm
Battery	LiFePO4/C 6.4V 3.0Ah



PHOTOMETRY [m]

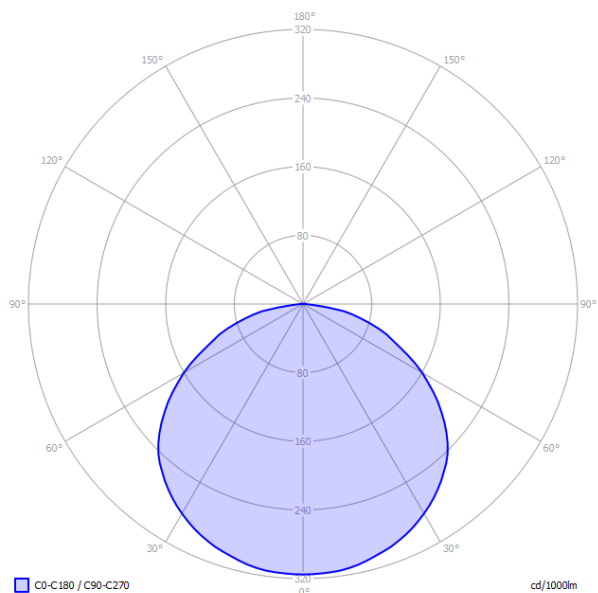

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

4,6
5,0
5,6
6,0
6,5
6,6
6,7
6,6
6,6

Distance fitting - fitting

11,5
12,8
14,4
15,6
17,0
18,6
19,5
20,5
21,3





ITECH C1 302 M ST

TM-IT.C1STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Insulation class	2
Luminous flux	238 lm
Battery	LiFePO4/C 6.4V 1.5Ah



PHOTOMETRY [m]

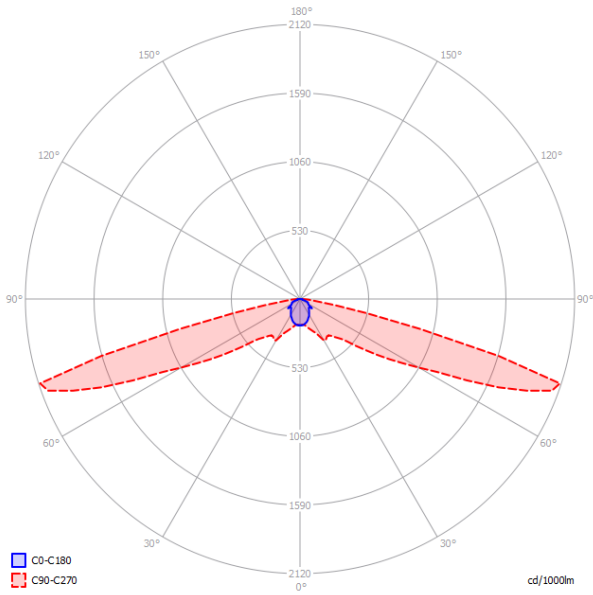

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

8,6
9,6
11,0
9,2
4,5
3,5

Distance fitting - fitting

19,2
22,0
26,5
29,5
27,5
22,0





ITECH C2 305 M ST

TM-IT.C2STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Insulation class	2
Luminous flux	478 lm
Battery	LiFePO4/C 6.4V 3.0Ah



PHOTOMETRY [m]

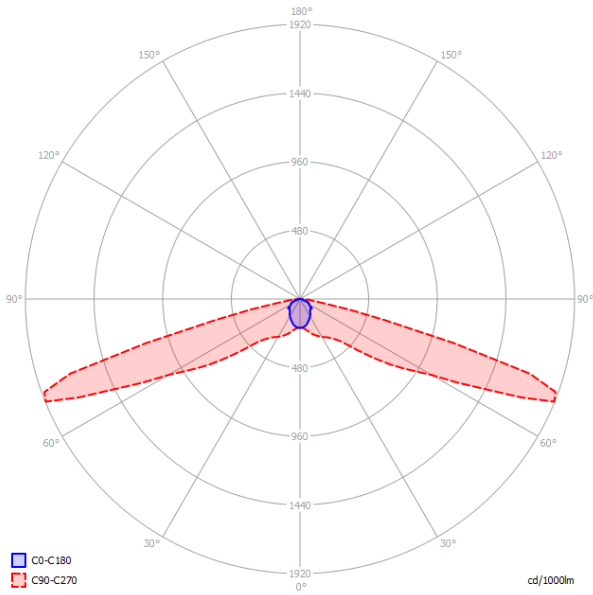

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

8,9
10,1
12,6
14,2
15,4
14,6
10,5
5,8
5,2

Distance fitting - fitting

19,8
22,7
28,2
33,0
37,2
40,5
33,2
29,0
27,0





ITECH F1 302 M ST

TM-IT.F1STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Insulation class	2
Luminous flux	269 lm
Battery	LiFePO4/C 6.4V 1.5Ah



PHOTOMETRY [m]

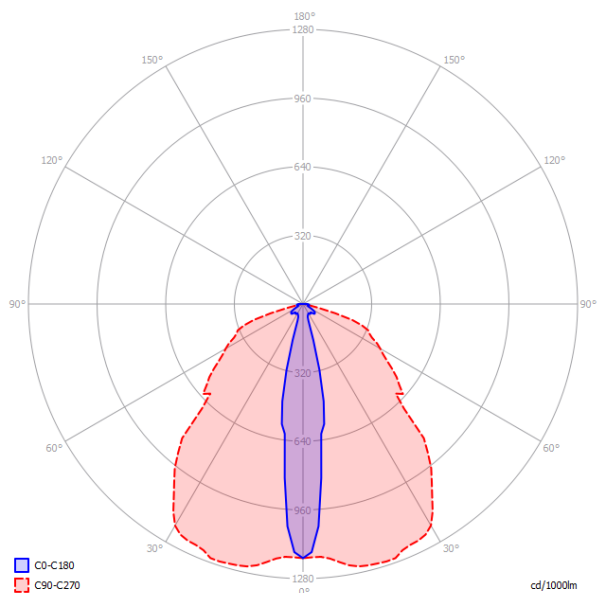

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

5,1
5,5
6,0
6,7
7,0
7,1
7,5
7,9
8,1

Distance fitting - fitting

12,8
13,8
15,4
16,7
17,8
18,9
19,6
19,8
20,0





ITECH F2 305 M ST

TM-IT.F2STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	escape route lighting
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Insulation class	2
Luminous flux	499 lm
Battery	LiFePO4/C 6.4V 3.0Ah



PHOTOMETRY [m]

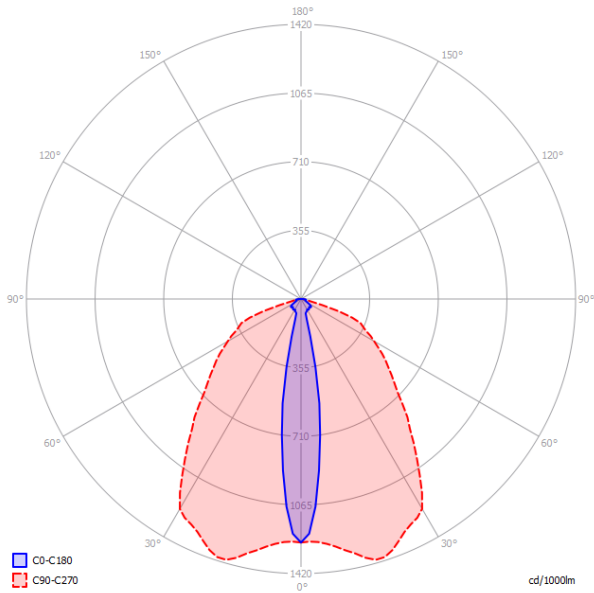

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

6,1
6,8
7,6
8,3
8,8
9,3
9,7
10,0
10,2

Distance fitting - fitting

14,5
16,2
18,9
20,5
22,2
23,5
24,5
25,7
26,5





ITECH W1 302 M ST

TM-IT.W1STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	lighting of the final exit / fire-protection devices
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	6.4 W
Insulation class	2
Luminous flux	230 lm
Battery	LiFePO4/C 6.4V 1.5Ah



PHOTOMETRY [m]

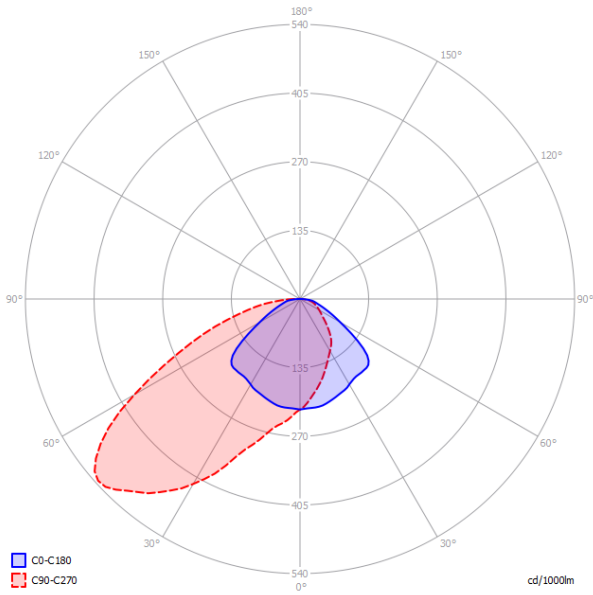

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

3,3
3,5
3,4
3,4

Distance fitting - fitting

7,9
8,4
8,6
8,7





ITECH W2 305 M ST

TM-IT.W2STM360W




PARAMETERS

Standards	PN-EN 60598-1, PN-EN 60598-2-2, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	lighting of the final exit / fire-protection devices
IP	IP65
IK	IK06
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	4.5 W
Active power	6 W
Insulation class	2
Luminous flux	470 lm
Battery	LiFePO4/C 6.4V 3.0Ah



PHOTOMETRY [m]

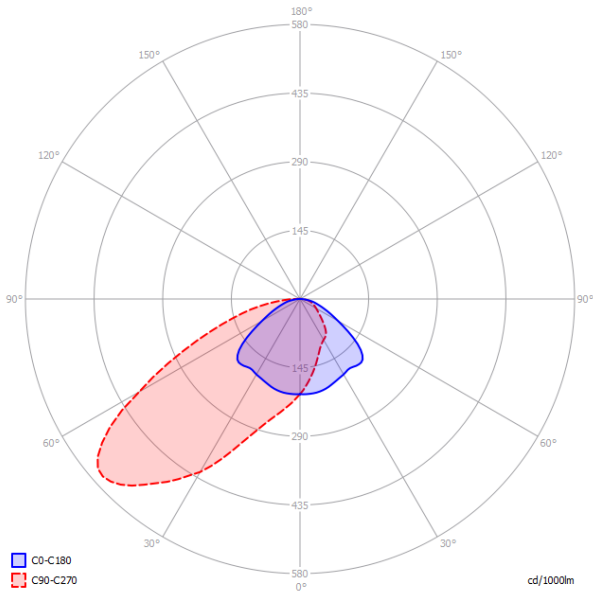

Ceiling height

2,5
3,0
4,0
5,0
6,0
7,0
8,0
9,0
10,0

Distance wall - fitting

4,1
4,2
4,4
4,5
4,3

Distance fitting - fitting

9,6
10,0
10,8
11,1
11,0

