



# UPLIGHT

## WORKSPACE LIGHTING



This innovative 110V Uplight features a high lumen output and 360° light distribution, making it an efficient solution for site lighting.

### Features


- High light output, ideal for large spaces
- Emergency version, switchable to prevent discharge during storage
- Aux socket for interlinking or power tools
- Convenient carry strap



### Specification

Material:	ABS + Polycarbonate
Colour Temperature:	6500K
Colour Finish:	Yellow
CRI	Ra>80
LED Lifetime:	L70B50 35,000 Hrs
IP Rating:	IP54
IK Rating:	IK07
Working Temperature:	-20°C to 40°C (Emergency version 0°C to 40°C)
Power Factor	>0.9
Electrical Class:	Class I
Emergency Battery Type:	Ni-Cd
Guarantee:	2 Years


### Dimensions

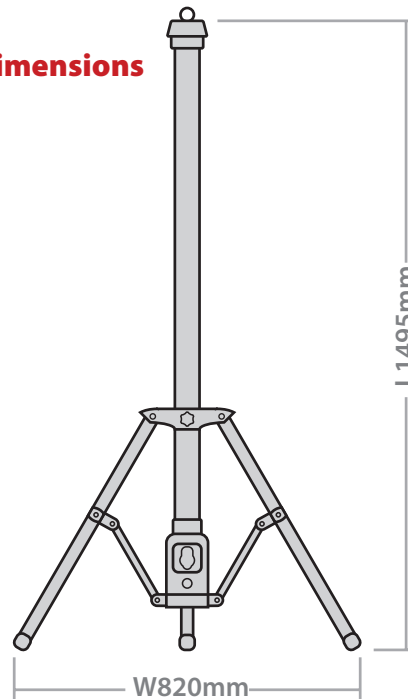

Product Code	Description	Wattage	Lumen output	Emergency Lumen Output	Efficacy	Net Weight	Barcodes
ULS72YPW	Uplight with 3m cable + 16A plug/socket	72W	7200 lm	-	100 lm/W	3.16	5055807620482
ULE72YPW	Uplight Emergency with 3m cable + 16A plug/socket	72W	7200 lm	350 lm	100 lm/W	3.34	5055807620475



Light Distribution Curve

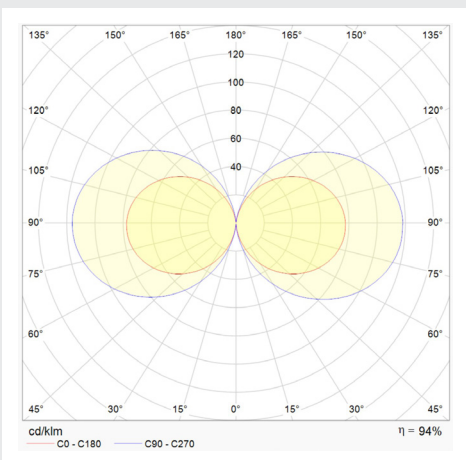

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)