




# TM.ONTEC C M1 180 NM ST

TM-OC.M1STN800W




## PARAMETERS

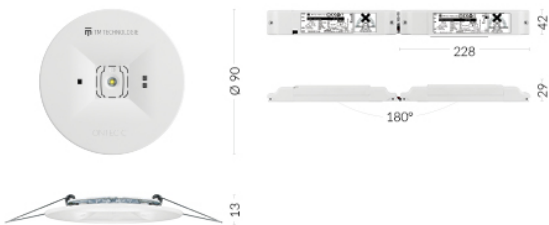

Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Temperature range	10-35 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.2 W
Insulation class	2
Luminous flux	167 lm
Battery	LiFePO4/C 3.2V 1.5Ah




## PHOTOMETRY [m]

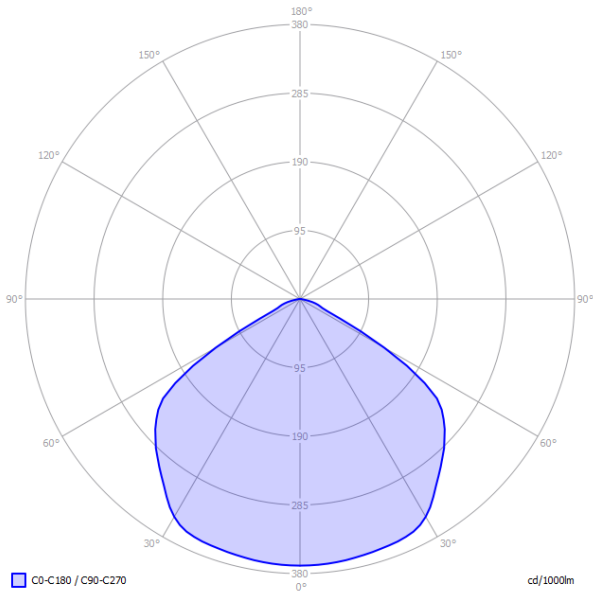



# TM.ONTEC C M2 302 M ST

TM-OC.M2.ST002

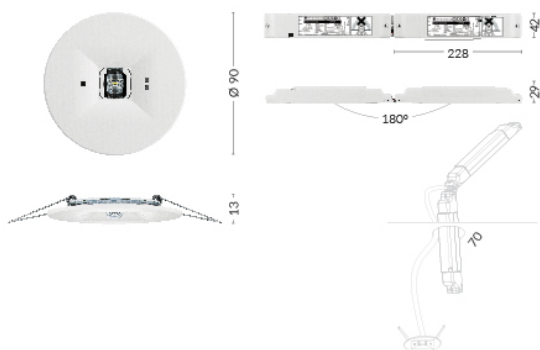

## PARAMETRY


Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-35 °C
Material	PC
Time	3 h
Colour	white
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	3W
Active power	7.0W
Luminous flux	274 lm
Battery	LiFePO4/C 6.4V 1.5Ah





# TM.ONTEC C M2H 303 M ST

TM-OC.MH.ST002

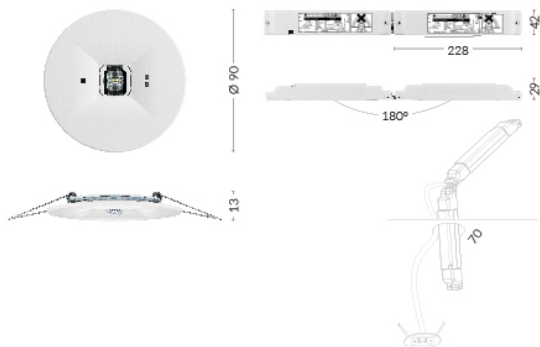

## PARAMETRY


Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months
Application	anti-panic lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-35 °C
Material	PC
Time	3 h
Colour	white
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	8.6 W
Luminous flux	374 lm
Battery	LiFePO4/C 6.4V 3.0Ah





# TM.ONTEC C C1U 301 NM ST

TM-OC.CU.ST010

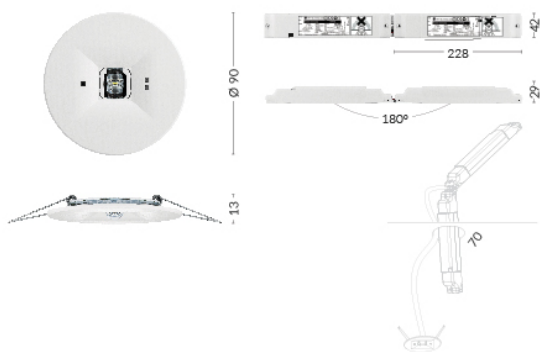

## PARAMETRY


Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months
Application	escape route lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-35 °C
Material	PC
Time	3 h
Colour	white
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	1.8 W
Luminous flux	134 lm
Battery	Ni-Cd HT 3.6V 1.5Ah





# TM.ONTEC C C1 302 M ST

TM-OC.C1.ST002

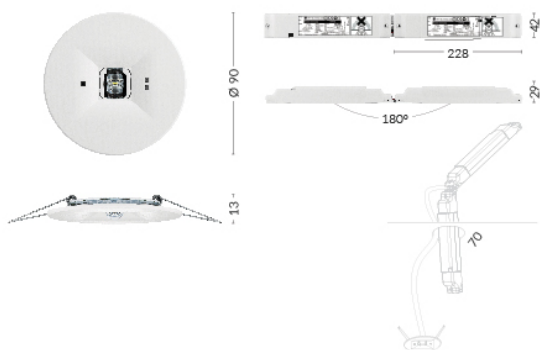

## PARAMETRY


Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months
Application	escape route lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-35 °C
Material	PC
Time	3 h
Colour	white
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	3W
Active power	7.0W
Luminous flux	247 lm
Battery	LiFePO4/C 6.4V 1.5Ah





# TM.ONTEC C C1H 303 M ST

TM-OC.CH.ST001

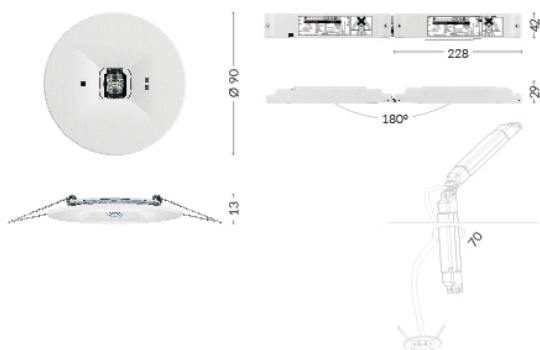

## PARAMETRY

Standards	PN-EN 60598-1, PN-EN 60598-2-22, PN-EN 61347-1, PN-EN 61347-2-7, PN-EN 61347-2-13, PN-EN 55015, PN-EN 61000-3-2, PN-EN 62031, PN-EN 62471, PN-EN 1838
Warranty	24 months
Application	escape route lighting
IP	IP20
IK	IK03
Version	ST – for button test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	10-35 °C
Material	PC
Time	3 h
Colour	white
Operating mode	M
Maximum light power (the luminaire can power the light source with a different power)	3 W
Active power	8.6 W
Luminous flux	336 lm
Battery	LiFePO4/C 6.4V 3.0Ah

