




# WEATHERGUARD SITE

WITH FLEX & JUNCTION BOX

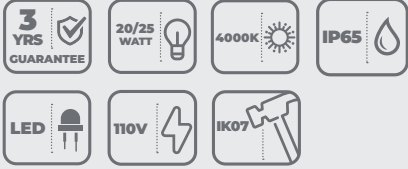

For fast and efficient installation, Weatherguard Site is also available pre-wired with 1m of cable and junction box. Save time and money on site.




## Features

- Pre-wired with 1m cable and junction box
- Fast and easy to install
- High efficacy - 100 lm/W
- Standard & emergency versions available

## Specification

<b>Material:</b>	Body & Diffuser: Polycarbonate Retaining Clips: Stainless Steel
<b>Colour Temperature:</b>	4000K
<b>Colour Finish:</b>	Yellow
<b>CRI:</b>	Ra>80
<b>LED Lifetime:</b>	L70B50 30,000 Hrs
<b>IP Rating:</b>	IP65
<b>IK Rating:</b>	IK07
<b>Working Temperature:</b>	-25°C to 40°C (Emergency version 0°C to 40°C)
<b>Emergency Battery Type:</b>	Ni-Cd
<b>Power Factor:</b>	0.5 / 0.9
<b>Electrical Class:</b>	Class I
<b>Guarantee:</b>	3 Years (1 year for emergency batteries)

## Dimensions


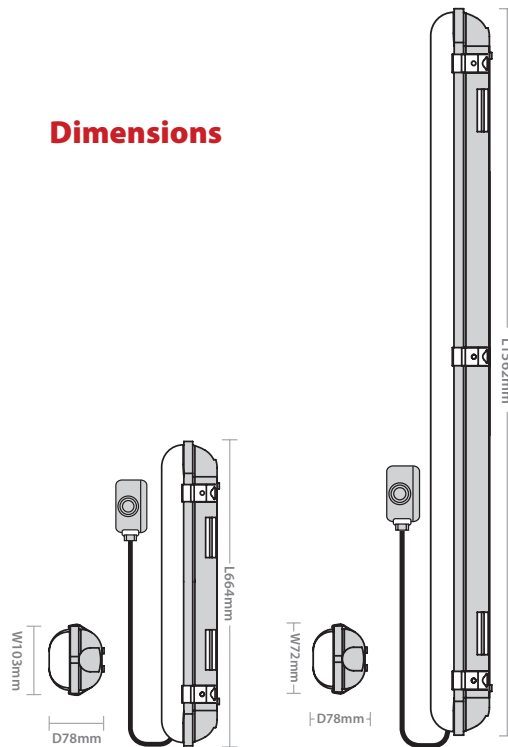


Product Code	Description	Length	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Power Factor	Barcodes	Net Weight (kg)
WGS220Y/PC	Weatherguard Site c/w Flex & Junction Box	600mm	20W	2000 lm	-	100 lm/W	0.5	5055807622721	0.98
WGS220Y-E/PC	Weatherguard Site c/w Flex & Junction Box with 3Hr Emergency	600mm	20W	2000 lm	180 lm	100 lm/W	0.5	5055807622738	1.32
WGS525Y/PC	Weatherguard Site c/w Flex & Junction Box	1500mm	25W	2500 lm	-	100 lm/W	0.9	5055807623636	1.4
WGS525Y-E/PC	Weatherguard Site c/w Flex & Junction Box with 3Hr Emergency	1500mm	25W	2500 lm	225 lm	100 lm/W	0.9	5055807623643	1.75

**Maximum Fittings Per Circuit**

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
WGS220Y/PC WGS220Y-E/PC	14	56	56	56	98	56	56	56	98
WGS525Y/PC WGS525Y-E/PC	10	42	42	42	77	42	42	42	77

Light Distribution Curve

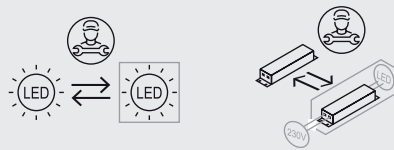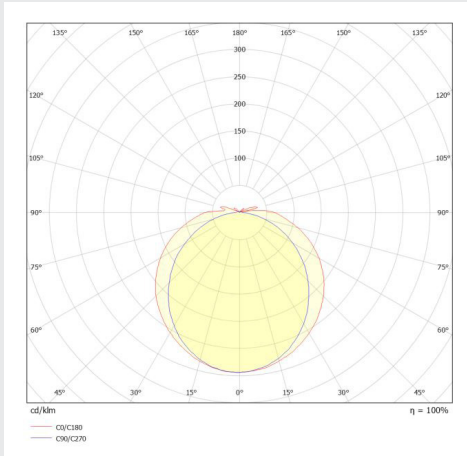

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)