



## Manufacturer's lamp cross reference

Sylvania	Osram	Philips	GE	Megaman
Mini-Lynx® Standard	Duluxstar Stick	Esaver Genie	Electronic Stick T3 Mini Eco	Tubular
Mini-Lynx® Fast-Start 10K hrs	Dulux Superstar Stick	PL-Electronic	Electronic Stick T3 mini	Liliput
Mini-Lynx® Compact Fast-Start Stick	-	-		Liliput plus
Mini-Lynx® Compact Fast-Start Spiral	Dulux Superstar Micro Twist	Esaver Tornado	Electronic Spiral T2	Spiral
Mini-Lynx® Compact GLS	Duluxstar Classic A	PL-Electronic Ambience	Electronic Energy Smart T2	Classic
Mini-Lynx® Compact Candle	Duluxstar Mini Candle	Esaver Candle	Electronic Candle T2	Ultra Compact Candle/Candlelight
Mini-Lynx® Compact Ball	Duluxstar Mini Ball	Esaver T shape	Electronic Spherical T2	Ultra Compact Classic
Mini-Lynx® Globe	Duluxstar Globe	PL Electronic Globe	Electronic Globe	Globe
Mini-Lynx® Dimmable (dimmer)	Dulux Intelligent Dim	PL-Electronic Dimmable	Electronic Spiral T3 Dimmable	Dimmerable
Mini-Lynx® Dimmable (switch)	Dulux Intelligent Vario	-		DorS Dimming
Mini-Lynx® Reflector GU10	Duluxstar Reflector	Esaver Downlighter GU10	Electronic GU10	GU10 Reflector
Mini-Lynx® R50 - R80 Reflector	Duluxstar Reflector	Esaver Downlighter	Electronic Reflector T2	Compact Reflector
Lynx-T	DULUX T	Master PL-T 2 Pins	Biax T	
Lynx-TE	DULUX T/E	Master PL-T 4 Pins	Biax TE	
Lynx-D	DULUX D	Master PL-C 2 Pins	Biax D	
Lynx-DE	DULUX D/E	Master PL-C 4 Pins	Biax DE	
Lynx-SE	DULUX S/E	Master PL-S 4 Pins	Biax SE	
Lynx-S	DULUX S	Master PL-S 2 Pins	Biax S	
Lynx-L	DULUX L	Master PL-L 4 Pins	Biax L	
Lynx-LE	DULUX L	Master PL-L 4 Pins	Biax L	
Lynx-F	DULUX F	-	-	
Lynx-Q	-	-	-	
Lynx-QE	-	-	-	

# COMPACT FLUORESCENT



## MICRO-LYNX® LAMPS

Micro-Lynx Luna 86      Micro-Lynx F Third Generation 87



## MINI-LYNX® LAMPS

Mini-Lynx Standard	88	Mini-Lynx Ball	94
Mini-Lynx Fast-Start 10K hrs	89	Mini-Lynx Globe	95
Mini-Lynx Compact Fast-Start Stick	90	Mini-Lynx Dimmable	96
Mini-Lynx Compact Fast-Start Spiral	91	Mini-Lynx Reflector GU10	97
Mini-Lynx Compact GLS	92	Mini-Lynx R50-R80 Reflector	98
Mini-Lynx Compact Candle	93		



## LYNX LAMP

Lynx - T	99	Lynx - L	106
Lynx - TE Amalgam	100	Lynx - LE	107
Lynx - TE FSD	101	Lynx - F	108
Lynx - D	102	Lynx - Q	109
Lynx - DE	103	Lynx - QE	110
Lynx - S	104		
Lynx - SE	105		

## TECHNICAL DATA

Spectral Power Distribution 111      Circuit Diagrams 112



Compact fluorescent lamps are available in a wide range of shapes and formats to meet the growing need for compact, energy efficient and long lasting lamps, coupled with excellent colour rendering.

They are the result of traditional fluorescent lamp making skills which, when combined with an integral state-of-the-art electronic ballast and starter circuit, such as in Mini-Lynx Fast-start, create a range of retrofit lamps that will directly replace incandescent mains voltage filament lamps.

Compact fluorescent lamps are also available without integral ballast, for use in traditional magnetic ballast fixtures or in the new generation of high efficiency, electronic ballast, downlights and luminaires.

The Lynx range offers a comprehensive range of light source solutions for diverse applications – for example for use in downlights and luminaires for shops and offices, fast food chains, hotel and bar lighting schemes, signs or in low battery drain emergency lighting units.

Mini-Lynx and Lynx lamps share the common features of long life, high colour rendering and constant light output throughout their life.

Following the success of our well known Micro-Lynx F lamp, we are now proudly introducing a third generation which is Fast-Start with an increased average rated life of 8,000 hours. Also, an additional product Micro-Lynx Luna joins the family.





#### MINI-LYNX® LUNA

New to the Micro-Lynx family is the Luna range, which stands out from similar products on the market thanks to its strikingly stylish 'satin' cover design. Coupled with an even longer life, Micro-Lynx Luna is an ideal and attractive solution for a wide range of domestic and commercial applications.



#### MINI-LYNX® FAST-START

A comprehensive range of quick-starting compact T3 lamps. By producing light within seconds of switch on these lamps are the perfect long life alternative for incandescent lamps. Their small size enables the lamps to be used in a variety of fixtures, where a standard stick lamp would be visible.



#### MINI-LYNX® COMPACT GLS, BALL & CANDLE

The frosted finish of these energy saving lamps mimics frosted incandescent lamps, whilst providing a high level of light output. For use in decorative fixtures where the lamp can be seen, these lamps are ideal for customers who would like to save energy, whilst keeping the look of a traditional incandescent.



#### MINI-LYNX® DIMMABLE

Up until recently it was not possible for CFL's to be dimmed. However now the technology is available in the Mini-Lynx Dimmable to vary the brightness of the lamp, with or without a dimmer switch. Sylvania's Switch dimmable allows the user to dim the lamp from 100% to 3% with a standard switch. Unlike most competitor switch dimmers Sylvania's lamp is not staged, Switch on/off/on and the lamps fluctuates from high to low, allowing the user to select any brightness.




#### MINI-LYNX® Q

With their excellent price-performance ratio, Lynx® Q compact fluorescent lamps reduce energy and maintenance bills without compromising on light quality or lumen output. The flat profile is ideal for slim luminaires, while the shallow, broad configuration ensures unusually even light distribution.

## MICRO-LYNX® LUNA



- High switch cycle to at least 30,000 times over the life time
- New ballast with pre-heat function
- Ultra compact size - 75mm wide x 28 mm depth
- Colour rendering - Ra85/Class 1B
- Integrated twist and lock safety key
- Integral electronic ballast
- Also available in Red, Green and Blue
- Average rated life: 10,000 hours

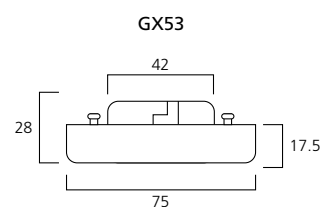


## MICRO-LYNX® LUNA

Code	Description	Watt	Cap	Colour	Colour Temp	Luminous Flux	Packing Qty
<b>Micro-Lynx Luna Homelight Deluxe (827)</b>							
<b>0025476</b>	Micro-Lynx Luna	6W	GX53	White	2700K	235 lm	20
<b>Micro-Lynx Luna Warm White Deluxe (830)</b>							
<b>0025477</b>	Micro-Lynx Luna	6W	GX53	White	3000K	235 lm	20
<b>Micro-Lynx Luna Cool White Deluxe (840)</b>							
<b>0025478</b>	Micro-Lynx Luna	6W	GX53	White	4000K	235 lm	20
<b>Micro-Lynx Luna Daylight Deluxe (860)</b>							
<b>0025479</b>	Micro-Lynx Luna	6W	GX53	White	6000K	235 lm	20
<b>Micro-Lynx Luna Colours</b>							
<b>0025490</b>	Micro-Lynx Luna	6W	GX53	Red		170 lm	20
<b>0025491</b>	Micro-Lynx Luna	6W	GX53	Green		310 lm	20
<b>0025492</b>	Micro-Lynx Luna	6W	GX53	Blue		110 lm	20

## MICRO-LYNX® F THIRD GENERATION



- Fast start, lamps start immediately after switching on
- Ultra compact size – 75mm wide x 25mm depth
- Colour rendering – Ra85/Class 1B
- Integrated twist and lock safety key
- Integral electronic ballast
- Also available in Red, Green and Blue
- Average rated life: 8000 hours

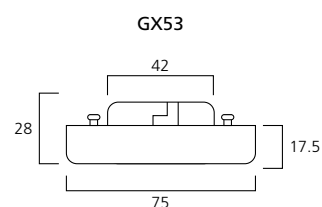

### MICRO-LYNX® F


Code	Description	Watt	Cap	Colour	Colour Temp	Luminous Flux	Packing Qty
<b>Micro-Lynx F Homelight Deluxe (827)</b>							
<b>0025214</b>	Micro-Lynx F	6W	GX53	White	2700K	220 lm	20
<b>Micro-Lynx F Warm White Deluxe (830)</b>							
<b>0025218</b>	Micro-Lynx F	6W	GX53	White	3000K	220 lm	20
<b>Micro-Lynx F Cool White Deluxe (840)</b>							
<b>0025219</b>	Micro-Lynx F	6W	GX53	White	4000K	220 lm	20
<b>Micro-Lynx F Daylight Deluxe (860)</b>							
<b>0025208</b>	Micro-Lynx F	6W	GX53	White	6000K	220 lm	20
<b>Micro-Lynx F Colours</b>							
<b>0025244</b>	Micro-Lynx F	6W	GX53	Red		170 lm	20
<b>0025245</b>	Micro-Lynx F	6W	GX53	Green		310 lm	20
<b>0025246</b>	Micro-Lynx F	6W	GX53	Blue		110 lm	20



## MINI-LYNX® STANDARD



- Cost effective range of energy saving lamps
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E27 Cap in Homelight (827) & Cool White (840)
- Average rated life 8,000 hrs
- To be used in dry applications

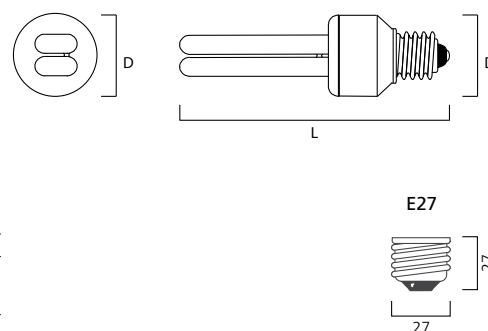

E27	9W	11W	15W	20W	23W
L	138	138	169	168	177
D	44	44	47	52	52

## MINI-LYNX® STANDARD

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Standard /Economy Homelight (827)</b>						
<b>0026260</b>	9W/E27	9W	E27	2700K	490 lm	20
<b>0026261</b>	11W/E27	11W	E27	2700K	600 lm	20
<b>0024912</b>	15W/E27	15W	E27	2700K	900 lm	10
<b>0024916</b>	20W/E27	20W	E27	2700K	1200 lm	10
<b>0024917</b>	23W/E27	23W	E27	2700K	1425 lm	10
<b>ML Standard /Economy Cool White (840)</b>						
<b>0026441</b>	11W/E27	11W	E27	4000K	600 lm	20
<b>0024918</b>	15W/E27	15W	E27	4000K	900 lm	10
<b>0024919</b>	20W/E27	20W	E27	4000K	1200 lm	10
<b>0024915</b>	23W/E27	23W	E27	4000K	1425 lm	10




## MINI-LYNX® FAST-START 10K hrs



- Compact, Fast-start energy saving lamps
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14, E27 and B22 Cap
- Available in a wide range of colours, Homelight (827), Cool White (840) & Daylight (860)
- Average rated life 10,000 hrs
- To be used in dry applications

E14	5W	8W	11W	15W	20W	23W
L	106	109	102	-	-	-
D	38	44	48	-	-	-
E27						
L	104	106	100	112	134	150
D	38	44	48	48	48	48
B22						
L	-	104	98	100	132	148
D	-	44	48	48	48	48

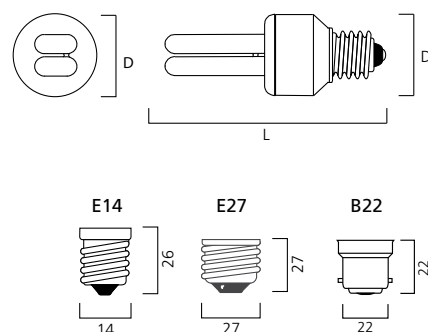

## MINI-LYNX® FAST-START 10K hrs

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Mini-Lynx Fast-start 10K Homelight (827)</b>						
0031140	5W/E14	5W	E14	2700K	250 lm	10
0031141	5W/E27	5W	E27	2700K	250 lm	10
0031143	8W/E14	8W	E14	2700K	450 lm	10
0031146	8W/E27	8W	E27	2700K	450 lm	10
0031147	8W/B22	8W	B22	2700K	450 lm	10
0031151	11W/E14	11W	E14	2700K	600 lm	10
0031155	11W/E27	11W	E27	2700K	600 lm	10
0031159	11W/B22	11W	B22	2700K	600 lm	10
0031161	15W/E27	15W	E27	2700K	900 lm	10
0031165	15W/B22	15W	B22	2700K	900 lm	10
0031167	20W/E27	20W	E27	2700K	1200 lm	10
0031171	20W/B22	20W	B22	2700K	1200 lm	10
0031173	23W/E27	23W	E27	2700K	1450 lm	10
0031176	23W/B22	23W	B22	2700K	1450 lm	10
<b>Mini-Lynx Fast-start 10K Cool White (840)</b>						
0031144	8W/E14	8W	E14	4000K	450 lm	10
0031148	8W/E27	8W	E27	4000K	450 lm	10
0031152	11W/E14	11W	E14	4000K	600 lm	10
0031156	11W/E27	11W	E27	4000K	600 lm	10
0031162	15W/E27	15W	E27	4000K	900 lm	10
0031168	20W/E27	20W	E27	4000K	1200 lm	10
0031174	23W/E27	23W	E27	4000K	1450 lm	10
<b>Mini-Lynx Fast-start 10K Daylight (860)</b>						
0031149	8W/E27	8W	E27	6000K	450 lm	10
0031153	11W/E14	11W	E14	6000K	585 lm	10
0031157	11W/E27	11W	E27	6000K	585 lm	10
0031163	15W/E27	15W	E27	6000K	875 lm	10
0031169	20W/E27	20W	E27	6000K	1200 lm	10
0031175	23W/E27	23W	E27	6000K	1380 lm	10




## MINI-LYNX<sup>®</sup> COMPACT FAST-START STICK



- Sylvania's smallest fast-start energy saving lamps
- Compact dimensions
- Instant flicker-free start
- Delivers 60% light in less than 1 minute – no waiting
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14, E27 and B22 Cap
- Available in a wide range of colours, Homelight (827), Cool White (840) & Daylight (860)
- Average rated life 6,000 hrs
- To be used in dry applications

<b>E14</b>	<b>5W</b>	<b>7W</b>	<b>9W</b>	<b>11W</b>	<b>15W</b>
L	86	92	102	110	126
D	38	38	38	38	43
<b>E27</b>					
L	84	90	100	108	120
D	37	38	38	38	43
<b>B22</b>					
L	-	-	-	106	118
D	-	-	-	38	43

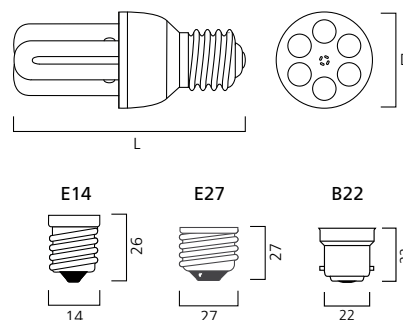

## MINI-LYNX<sup>®</sup> COMPACT FAST-START


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Compact Fast-start Stick Homelight (827)</b>						
<b>0031001</b>	5W/E14	5W	E14	2700K	180 lm	10
<b>0031003</b>	5W/E27	5W	E27	2700K	180 lm	10
<b>0031019</b>	7W/E14	7W	E14	2700K	286 lm	10
<b>0031021</b>	7W/E27	7W	E27	2700K	286 lm	10
<b>0031023</b>	9W/E14	9W	E14	2700K	405 lm	10
<b>0031025</b>	9W/E27	9W	E27	2700K	405 lm	10
<b>0031126</b>	11W/E14	11W	E14	2700K	540 lm	10
<b>0031029</b>	11W/E27	11W	E27	2700K	540 lm	10
<b>0031031</b>	11W/B22	11W	B22	2700K	540 lm	10
<b>0031127</b>	15W/E14	15W	E14	2700K	800 lm	10
<b>0031037</b>	15W/E27	15W	E27	2700K	800 lm	10
<b>0031039</b>	15W/B22	15W	B22	2700K	800 lm	10
<b>ML Compact Fast-start Stick Cool White (840)</b>						
<b>0031027</b>	9W/E27	9W	E27	4000K	405 lm	10
<b>0031033</b>	11W/E27	11W	E27	4000K	540 lm	10
<b>0031041</b>	15W/E27	15W	E27	4000K	800 lm	10
<b>ML Compact Fast-start Stick Daylight (860)</b>						
<b>0031035</b>	11W/E27	11W	E27	6000K	540 lm	10
<b>0031117</b>	15W/E27	15W	E27	6000K	800 lm	10

## MINI-LYNX® COMPACT FAST-START SPIRAL



- Sylvania's smallest fast-start energy saving lamps
- Compact dimensions
- Spiral design for maximum light dispersal
- Instant flicker-free start
- Delivers 60% light in less than 1 minute – no waiting
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14, E27 and B22 Cap, in Homelight (827) & Cool White (840)
- Average rated life 10,000 hrs
- To be used in dry applications

<b>E14</b>	<b>8W</b>	<b>12W</b>	<b>15W</b>	<b>20W</b>
L	89	94	-	-
D	46	46	-	-
<b>E27</b>				
L	84	88	99	108
D	46	46	50	54
<b>B22</b>				
L	-	86	97	106
D	-	46	50	54

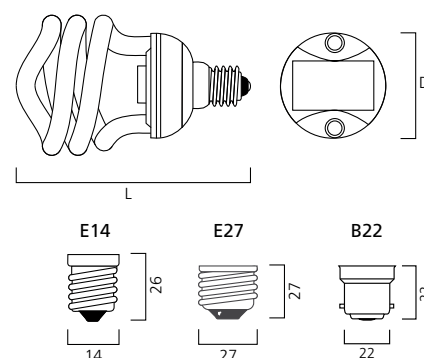

## MINI-LYNX® COMPACT FAST-START SPIRAL

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Compact Fast-start Spiral Homelight (827)</b>						
<b>0031005</b>	8W/E14	8W	E14	2700K	405 lm	10
<b>0031007</b>	8W/E27	8W	E27	2700K	405 lm	10
<b>0031123</b>	12W/E14	12W	E14	2700K	630 lm	10
<b>0031009</b>	12W/E27	12W	E27	2700K	630 lm	10
<b>0031011</b>	12W/B22	12W	B22	2700K	630 lm	10
<b>0031013</b>	15W/E27	15W	E27	2700K	845 lm	10
<b>0031015</b>	15W/B22	15W	B22	2700K	845 lm	10
<b>0031249</b>	20W/E27	20W	E27	2700K	1200 lm	10
<b>0031139</b>	20W/B22	20W	B22	2700K	1200 lm	10
<b>ML Compact Fast-start Spiral Cool White (840)</b>						
<b>0031017</b>	15W/E27	15W	E27	4000K	845 lm	10
<b>0031250</b>	20W/E27	20W	E27	4000K	1200 lm	10



## MINI-LYNX® COMPACT GLS




- Compact dimensions
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- Opal housing -Delivers all-round illumination whilst hiding the fluorescent tube design
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E27 and B22 Cap, in Homelight (827) & Cool White (840)
- Average rated life 10,000 hrs
- To be used in dry applications

E27	7W	11W	15W	20W
L	116	130	130	149
D	60	64	64	75

B22	7W	11W	15W	20W
L	-	128	128	147
D	-	64	64	75



## MINI-LYNX® COMPACT GLS

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML GLS Homelight (827)</b>						
0024961	7W/E27	7W	E27	2700K	360 lm	10
0024962	11W/E27	11W	E27	2700K	610 lm	10
0031071	11W/B22	11W	B22	2700K	610 lm	10
0031073	15W/E27	15W	E27	2700K	810 lm	10
0031075	15W/B22	15W	B22	2700K	810 lm	10
0031213	20W/E27	20W	E27	2700K	1152 lm	10
0031211	20W/B22	20W	B22	2700K	1152 lm	10
<b>ML GLS Cool White (840)</b>						
0024988	11W/E27	11W	E27	4000K	610 lm	10
0031077	15W/E27	15W	E27	4000K	810 lm	10
0031122	20W/E27	20W	E27	4000K	1152 lm	10




## MINI-LYNX<sup>®</sup> COMPACT CANDLE



- Compact dimensions
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- Opal housing -Delivers all-round illumination whilst hiding the fluorescent tube design
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14, E27 and B22 Cap, in Homelight (827) & Cool White (840)
- Average rated life 10,000 hrs
- To be used in dry applications

<b>E14</b>	<b>5W</b>	<b>7W</b>	<b>9W</b>
L	114	114	126
D	39	39	39
<b>E27</b>			
L	-	110	122
D	-	39	39
<b>B22</b>			
L	108	108	120
D	38	38	39

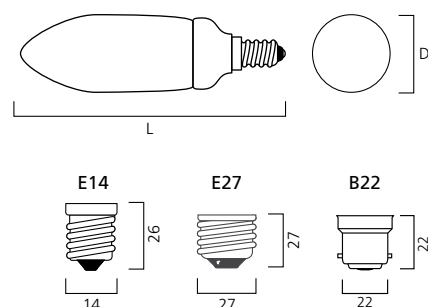

## MINI-LYNX<sup>®</sup> COMPACT CANDLE


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Candle Homelight (827)</b>						
<b>0031085</b>	5W/E14	5W	E14	2700K	200 lm	10
<b>0031089</b>	7W/E14	7W	E14	2700K	286 lm	10
<b>0031091</b>	7W/E27	7W	E27	2700K	286 lm	10
<b>0031093</b>	7W/B22	7W	B22	2700K	286 lm	10
<b>0031095</b>	9W/E14	9W	E14	2700K	405 lm	10
<b>0031097</b>	9W/E27	9W	E27	2700K	405 lm	10
<b>0031103</b>	9W/B22	9W	B22	2700K	405 lm	10
<b>ML Candle Cool White (840)</b>						
<b>0031087</b>	5W/E14	5W	E14	4000K	200 lm	10
<b>0031099</b>	9W/E27	9W	E27	4000K	405 lm	10
<b>0031101</b>	9W/E14	9W	E14	4000K	405 lm	10
<b>0031102</b>	9W/B22	9W	B22	4000K	405 lm	10

## MINI-LYNX® COMPACT BALL



- Compact dimensions
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- Opal housing -Delivers all-round illumination whilst hiding the fluorescent spiral design
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14, E27 and B22 Cap, in Homelight (827) & Cool White (840)
- Average rated life 10,000 hrs
- To be used in dry applications

<b>E14</b>	<b>5W</b>	<b>7W</b>	<b>9W</b>
L	88	96	103
D	45	50	50
<b>E27</b>	<b>7W</b>	<b>9W</b>	
L	-	91	98
D	-	50	50
<b>B22</b>	<b>7W</b>	<b>9W</b>	
L	-	89	96
D	-	50	50

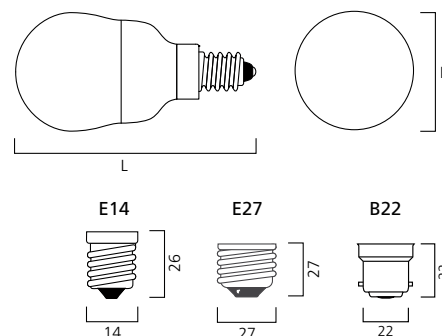

## MINI-LYNX® COMPACT BALL


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Ball Homelight (827)</b>						
<b>0031055</b>	5W/E14	5W	E14	2700K	200 lm	10
<b>0031118</b>	7W/E14	7W	E14	2700K	286 lm	10
<b>0031057</b>	7W/E27	7W	E27	2700K	286 lm	10
<b>0031059</b>	7W/B22	7W	B22	2700K	286 lm	10
<b>0031061</b>	9W/E14	9W	E14	2700K	405 lm	10
<b>0031063</b>	9W/E27	9W	E27	2700K	405 lm	10
<b>0031065</b>	9W/EB22	9W	B22	2700K	405 lm	10
<b>ML Ball Cool White (840)</b>						
<b>0031116</b>	9W/E14	9W	E14	4000K	405 lm	10
<b>0031064</b>	9W/E27	9W	E27	4000K	405 lm	10



## MINI-LYNX® GLOBE



- Globe shaped energy saving lamp
- Provides a flicker-free start within 2 seconds
- Opal housing -Delivers all-round illumination whilst hiding the fluorescent spiral design
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E27 Cap, in Homelight (827)
- Average rated life 6,000 hrs
- To be used in dry applications

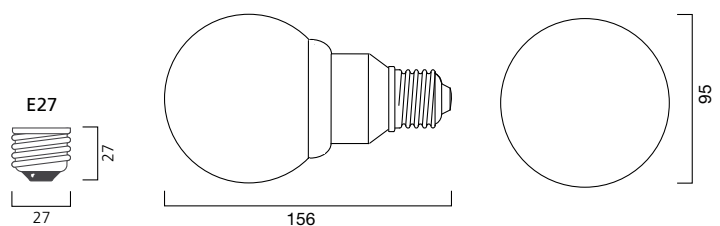

## MINI-LYNX® GLOBE

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Globe</b>						
<b>0024965</b>	20W/E27	20W	E27	2700K	1153 lm	10






## MINI-LYNX® DIMMABLE



- Dimmable from 100% - 3%
- Two versions - Dimmer dimmable for use with a dimmer switch, switch dimmable for use with standard
- Spiral design for maximum light dispersal
- No liquid mercury (<3.5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E27 and B22 Cap in Homelight (827)
- Average rated life 16.000 hrs
- To be used in dry applications

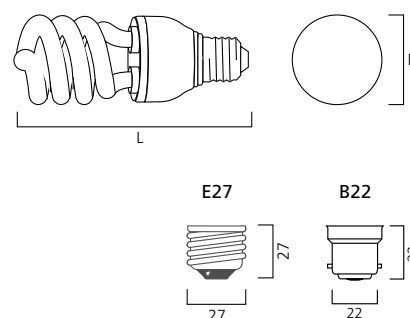

	E27	B22
L	124	122
D	54	54

## MINI-LYNX® DIMMABLE


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML Dimmable Homelight (827)</b>						
<b>0024833</b>	20W/E27	20W	E27	2700K	1300 lm	10
<b>0024834</b>	20W/E27	20W	E27	2700K	1300 lm	10



## MINI-LYNX® REFLECTOR GU10



- Energy saving alternative to standard Halogen lamps
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- No liquid mercury (<5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with GU10 Cap, in Homelight (827) & Cool White (840)
- Average rated life 8,000 hrs
- To be used in dry applications

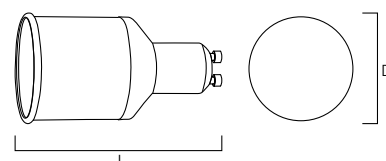

GU10



GU10	5W	7W	9W
L	82	82	91
D	50	50	52

## MINI-LYNX® REFLECTOR GU10


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>GU10 Homelight (827)</b>						
0031047	7W/GU10	7W	GU10	2700K	210 lm	10
0031049	9W/GU10	9W	GU10	2700K	230 lm	10
0031051	11W/GU10	11W	GU10	2700K	245 lm	10
<b>GU10 Cool White (840)</b>						
0031053	11W/GU10	11W	GU10	4000K	245 lm	10



## MINI-LYNX<sup>®</sup> R50 - R80 REFLECTOR



- Energy saving alternative to reflector incandescent lamps
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 1 minute – no waiting
- No liquid mercury (<5mg amalgam pill)
- Good colour rendering (>80Ra)
- Available with E14 and E27 Cap, in Homelight (827)
- Average rated life 10,000 hrs
- To be used in dry applications

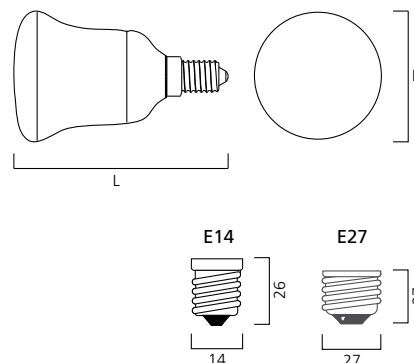

E14	5W	9W	15W	20W
L	85	107	-	-
D	50	63	-	-
E27	5W	9W	15W	20W
L	-	105	122	132
D	-	63	80	80

## MINI-LYNX<sup>®</sup> R50 - R80 REFLECTOR

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>ML R50 - R80 Reflector</b>						
<b>0031120</b>	5W/E14	5W	E14	2700K	165 lm	10
<b>0031107</b>	9W/E14	9W	E14	2700K	270 lm	10
<b>0031109</b>	9W/E27	9W	E27	2700K	270 lm	10
<b>0031113</b>	15W/E27	15W	E27	2700K	645 lm	10
<b>0031115</b>	20W/E27	20W	E27	2700K	675 lm	10



## LYNX®-T




universal




- Multi-limbed compact fluorescent lamps
- Excellent colour rendering – Ra85/ Class 1B
- For use with magnetic ballast
- Average rated life: 15000 hours

GX24d	18W	26W
L	97	112
D	49	49

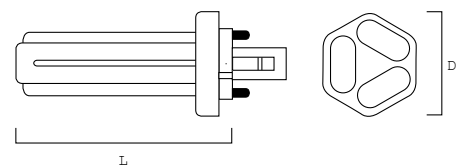

GX24d



## LYNX®-T


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-T Warm White Deluxe (830)</b>						
<b>0027801</b>	18W/830	18W	GX24d-2	3000K	1200 lm	10
<b>0027811</b>	26W/830	26W	GX24d-3	3000K	1800 lm	10
<b>Lynx-T Cool White Deluxe (840)</b>						
<b>0027802</b>	18W/840	18W	GX24d-2	4000K	1200 lm	10
<b>0027812</b>	26W/840	26W	GX24d-3	4000K	1800 lm	10



## LYNX® - TE AMALGAM



- Particularly suitable for use in the new generation of ultra compact fluorescent downlights and luminaires
- Amalgam technology designed for high temperature applications
- Excellent colour rendering - Ra 80 - 89 / Class 1B
- To be operated on electronic ballasts only
- Not recommended for dimming applications
- Average rated life: 15000 hours

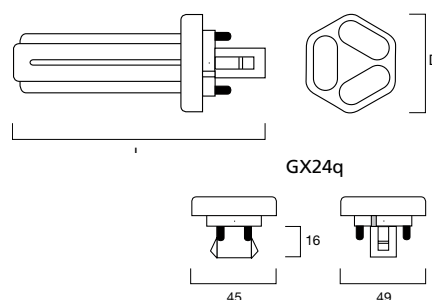

GX24q	18W	26W	32W	42W
L	97	112	128	149
D	49	49	49	49

## LYNX® - TE AMALGAM

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-TE Warm White Deluxe (830)</b>						
<b>0027817</b>	18W/830	18W	GX24q-2	3000K	1200 lm	10
<b>0027822</b>	26W/830	26W	GX24q-3	3000K	1800 lm	10
<b>0027842</b>	32W/830	32W	GX24q-3	3000K	2400 lm	10
<b>0027844</b>	42W/830	42W	GX24q-4	3000K	3200 lm	10
<b>Lynx-TE Cool White Deluxe (840)</b>						
<b>0027816</b>	18W/840	18W	GX24q-2	4000K	1200 lm	10
<b>0027821</b>	26W/840	26W	GX24q-3	4000K	1800 lm	10
<b>0027840</b>	32W/840	32W	GX24q-3	4000K	2400 lm	10
<b>0027845</b>	42W/840	42W	GX24q-4	4000K	3200 lm	10






## LYNX® - TE FSD



universal



- Highly efficient light source uses up to 80% less energy than equivalent incandescent lamps.
- Excellent colour rendering - Ra 80 - 89 / Class 1B
- Rapid Run-up
- Can be used in dimming applications
- Average Rated Life 15000 hrs

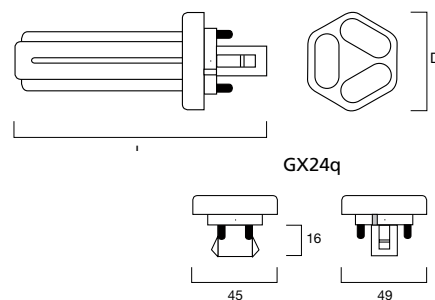

GX24q	18W	26W	32W	42W
L	97	112	128	149
D	49	49	49	49

## LYNX® - TE FSD

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-TE FSD Warm White Deluxe (830)</b>						
<b>0027851</b>	18W/830	18W	GX24q-2	3000K	1200 lm	10
<b>0027854</b>	26W/830	26W	GX24q-3	3000K	1800 lm	10
<b>0027857</b>	32W/830	32W	GX24q-3	3000K	2400 lm	10
<b>0027860</b>	42W/830	42W	GX24q-4	3000K	3200 lm	10
<b>Lynx-TE FSD Cool White Deluxe (840)</b>						
<b>0027852</b>	18W/840	18W	GX24q-2	4000K	1200 lm	10
<b>0027855</b>	26W/840	26W	GX24q-3	4000K	1800 lm	10
<b>0027858</b>	32W/840	32W	GX24q-3	4000K	2400 lm	10
<b>0027861</b>	42W/840	42W	GX24q-4	4000K	3200 lm	10






## LYNX® - D



- Two U shaped tubes and a 2 pin base which incorporates the starter and capacitor
- Excellent colour rendering – Ra85/Class 1B
- For use with magnetic ballast
- Uses considerably less power and last up to 10 times longer than incandescent lamps
- Average rated life: 10000 hours

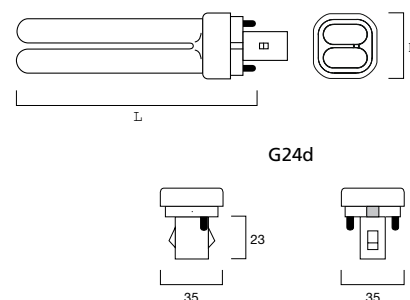

G24d	10W	13W	18W	26W
L	87	115	129	147
D	35	35	35	35


## LYNX®-D

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-D Homelight Deluxe (827)</b>						
0025904	10W/827	10W	G24d-1	2700K	600 lm	10
0025905	13W/827	13W	G24d-1	2700K	900 lm	10
0025906	18W/827	18W	G24d-2	2700K	1200 lm	10
0025907	26W/827	26W	G24d-3	2700K	1800 lm	10
<b>Lynx-D Warm White Deluxe (830)</b>						
0025908	10W/830	10W	G24d-1	3000K	600 lm	10
0025909	13W/830	13W	G24d-1	3000K	900 lm	10
0025910	18W/830	18W	G24d-2	3000K	1200 lm	10
0025911	26W/830	26W	G24d-3	3000K	1800 lm	10
<b>Lynx-D White Deluxe (835)</b>						
0025941	13W/835	13W	G24d-1	3500K	900 lm	10
0025942	18W/835	18W	G24d-2	3500K	1200 lm	10
0025943	26W/835	26W	G24d-3	3500K	1800 lm	10
<b>Lynx-D Cool White Deluxe (840)</b>						
0025912	10W/840	10W	G24d-1	4000K	600 lm	10
0025913	13W/840	13W	G24d-1	4000K	900 lm	10
0025914	18W/840	18W	G24d-2	4000K	1200 lm	10
0025915	26W/840	26W	G24d-3	4000K	1800 lm	10
<b>Lynx-D Daylight Deluxe (860)</b>						
0028322	10W/860	10W	G24d-1	6000K	600 lm	10
0028323	13W/860	13W	G24d-1	6000K	900 lm	10
0028324	18W/860	18W	G24d-2	6000K	1200 lm	10
0028325	26W/860	26W	G24d-3	6000K	1800 lm	10

## LYNX® - DE



- Two U shaped tubes and a 4 pin base without starter or capacitor
- Excellent colour rendering – Ra85/Class 1B
- To be operated on electronic ballast only
- Suitable for emergency lighting
- Average rated life: 12000 hours

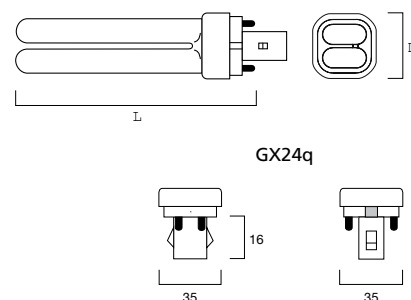

G24d	10W	13W	18W	26W
L	87	115	129	147
D	35	35	35	35


## LYNX® - DE

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-DE Homelight Deluxe (827)</b>						
0025916	10W/827	10W	G24q-1	2700K	600 lm	10
0025917	13W/827	13W	G24q-1	2700K	900 lm	10
0025918	18W/827	18W	G24q-2	2700K	1200 lm	10
0025919	26W/827	26W	G24q-3	2700K	1800 lm	10
<b>Lynx-DE Warm White Deluxe (830)</b>						
0025920	10W/830	10W	G24q-1	3000K	600 lm	10
0025921	13W/830	13W	G24q-1	3000K	900 lm	10
0025922	18W/830	18W	G24q-2	3000K	1200 lm	10
0025923	26W/830	26W	G24q-3	3000K	1800 lm	10
<b>Lynx-DE White Deluxe (835)</b>						
0025945	13W/835	13W	G24q-1	3500K	900 lm	10
0025946	18W/835	18W	G24q-2	3500K	1200 lm	10
0025947	26W/835	26W	G24q-3	3500K	1800 lm	10
<b>Lynx-DE Cool White Deluxe (840)</b>						
0025924	10W/840	10W	G24q-1	4000K	600 lm	10
0025925	13W/840	13W	G24q-1	4000K	900 lm	10
0025926	18W/840	18W	G24q-2	4000K	1200 lm	10
0025927	26W/840	26W	G24q-3	4000K	1800 lm	10
<b>Lynx-DE Daylight Deluxe (860)</b>						
0025948	10W/860	10W	G24q-1	6000K	600 lm	10
0025949	13W/860	13W	G24q-1	6000K	900 lm	10
0025950	18W/860	18W	G24q-2	6000K	1200 lm	10
0025951	26W/860	26W	G24q-3	6000K	1800 lm	10

## LYNX<sup>®</sup>-S



- U shaped tube and a 2 pin base which incorporates the starter and capacitor
- Excellent colour rendering – Ra85/Class 1B
- For use with magnetic ballast
- Average rated life: 10000 hours

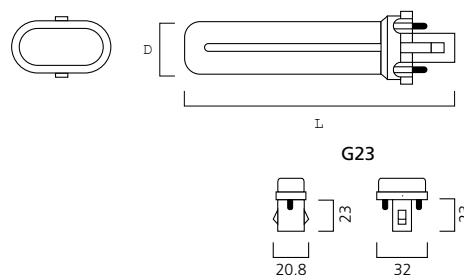

G23	5W	7W	9W	11W
L	105	134	165	233
D	28	28	28	28


## LYNX<sup>®</sup>-S

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-S Homelight Deluxe (827)</b>						
0025880	5W/827	5W	G23	2700K	250 lm	10
0025881	7W/827	7W	G23	2700K	420 lm	10
0025882	9W/827	9W	G23	2700K	600 lm	10
0025883	11W/827	11W	G23	2700K	900 lm	10
<b>Lynx-S Warm White Deluxe (830)</b>						
0025884	5W/830	5W	G23	3000K	250 lm	10
0025885	7W/830	7W	G23	3000K	420 lm	10
0025886	9W/830	9W	G23	3000K	600 lm	10
0025887	11W/830	11W	G23	3000K	900 lm	10
<b>Lynx-S Cool White Deluxe (840)</b>						
0025888	5W/840	5W	G23	4000K	250 lm	10
0025889	7W/840	7W	G23	4000K	420 lm	10
0025890	9W/840	9W	G23	4000K	600 lm	10
0025891	11W/840	11W	G23	4000K	900 lm	10

## LYNX®-SE



- U shaped tubes and a 4 pin base without starter or capacitor
- Excellent colour rendering – Ra85/Class 1B
- To be operated on electronic ballast only
- Suitable for emergency lighting
- Average rated life: 10000 hours

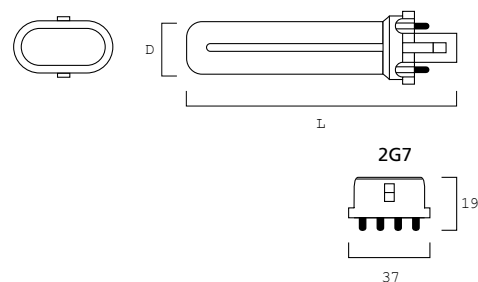


2G7	5W	7W	9W	11W
L	85	115	145	215
D	28	28	28	28


## LYNX®-SE

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-SE Homelight Deluxe (827)</b>						
<b>0025892</b>	5W/827	5W	2G7	2700K	250 lm	10
<b>0025893</b>	7W/827	7W	2G7	2700K	420 lm	10
<b>0025894</b>	9W/827	9W	2G7	2700K	600 lm	10
<b>0025895</b>	11W/827	11W	2G7	2700K	900 lm	10
<b>Lynx-SE Warm White Deluxe (830)</b>						
<b>0025896</b>	5W/830	5W	2G7	3000K	250 lm	10
<b>0025897</b>	7W/830	7W	2G7	3000K	420 lm	10
<b>0025898</b>	9W/830	9W	2G7	3000K	600 lm	10
<b>0025899</b>	11W/830	11W	2G7	3000K	900 lm	10
<b>Lynx-SE Cool White Deluxe (840)</b>						
<b>0025900</b>	5W/840	5W	2G7	4000K	250 lm	10
<b>0025901</b>	7W/840	7W	2G7	4000K	420 lm	10
<b>0025902</b>	9W/840	9W	2G7	4000K	600 lm	10
<b>0025903</b>	11W/840	11W	2G7	4000K	900 lm	10

## LYNX®-L

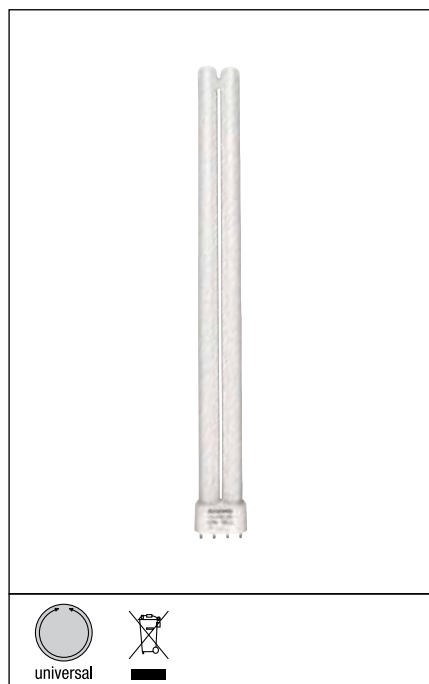

- Excellent colour rendering – Ra85/Class 1B
- 4-pin 2G11 cap without starter or capacitor
- Suitable for use in modular ceiling luminaires 300 x 300mm or 600 x 600mm
- To be used with magnetic ballast with remote starter and capacitor or on electronic ballast
- Dimmable with suitable ballast
- Average rated life: 15000 hours

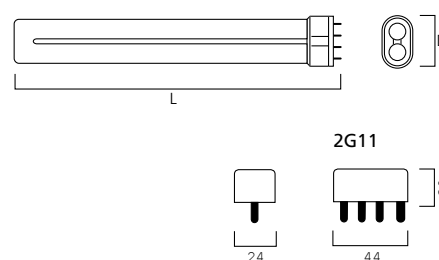


2G11	18W	24W	36W
L	225	320	415
D	38	38	38


## LYNX®-L

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-L Homelight Deluxe (827)</b>						
<b>0025226</b>	18W/827	18W	2G11	2700K	1200 lm	10
<b>0025227</b>	24W/827	24W	2G11	2700K	1800 lm	10
<b>0025228</b>	36W/827	36W	2G11	2700K	2900 lm	10
<b>Lynx-L Warm White Deluxe (830)</b>						
<b>0925233</b>	18W/830	18W	2G11	3000K	1200 lm	10
<b>0925235</b>	24W/830	24W	2G11	3000K	1800 lm	10
<b>0925237</b>	36W/830	36W	2G11	3000K	2900 lm	10
<b>Lynx-L Cool White Deluxe (840)</b>						
<b>0925234</b>	18W/840	18W	2G11	4000K	1200 lm	10
<b>0925236</b>	24W/840	24W	2G11	4000K	1800 lm	10
<b>0925238</b>	36W/840	36W	2G11	4000K	2900 lm	10
<b>Lynx-L Daylight Deluxe (865)</b>						
<b>0025685</b>	18W/865	18W	2G11	6000K	1200 lm	10
<b>0025686</b>	24W/865	24W	2G11	6000K	1800 lm	10
<b>0025687</b>	36W/865	36W	2G11	6000K	2900 lm	10

## LYNX® - LE

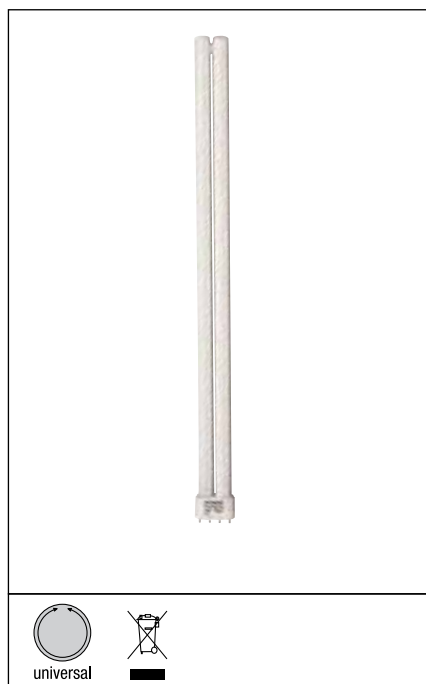

- Excellent colour rendering – Ra85/Class 1B
- 4-pin 2G11 cap without starter or capacitor
- Suitable for use in modular ceiling luminaires – 600 x 600mm
- To be used with electronic ballast only
- Dimmable with suitable ballast
- Average rated life: 15000 hours

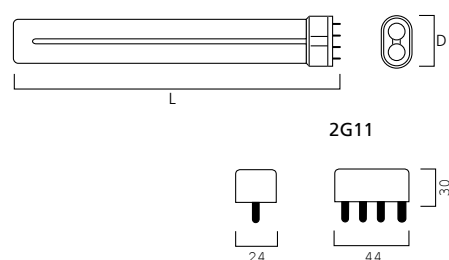

### LYNX®-LE

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-LE Homelight Deluxe (827)</b>						
<b>0025463</b>	55W/827	55W	2G11	2700K	4800 lm	10
<b>Lynx-LE Warm White Deluxe (830)</b>						
<b>0925461</b>	40W/830	40W	2G11	3000K	3500 lm	10
<b>0925464</b>	55W/830	55W	2G11	3000K	4800 lm	10
<b>Lynx-LE White Deluxe (835)</b>						
<b>0027914</b>	40W/835	40W	2G11	3500K	3500 lm	10
<b>0027916</b>	55W/835	55W	2G11	3500K	4800 lm	10
<b>Lynx-LE Cool White Deluxe (840)</b>						
<b>0925462</b>	40W/840	40W	2G11	4000K	3500 lm	10
<b>0925465</b>	55W/840	55W	2G11	4000K	4800 lm	10
<b>Lynx-LE Daylight Deluxe (865)</b>						
<b>0025688</b>	40W/865	40W	2G11	6000K	3500 lm	10
<b>0025689</b>	55W/865	55W	2G11	6000K	4800 lm	10




## LYNX®-F




universal



- Multi-limbed compact fluorescent lamps
- Half the length of corresponding L types
- Very good colour rendering – Ra85/Class 1B
- Ideal for small, flat luminaires for wall and ceiling mounting
- To be used with conventional magnetic or electronic ballast
- Average rated life: 15000 hours

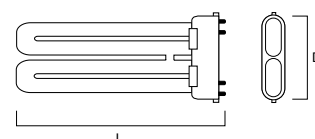

2G10



2G10	18W	24W	36W
L	122	165	217
D	79	79	79

## LYNX®-F

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-F Warm White Deluxe (830)</b>						
<b>0027830</b>	24W/830	24W	2G10	3000K	1700 lm	10
<b>0027835</b>	36W/830	36W	2G10	3000K	2800 lm	10
<b>Lynx-F Cool White Deluxe (840)</b>						
<b>0027826</b>	18W/840	18W	2G10	4000K	1100 lm	10
<b>0027831</b>	24W/840	24W	2G10	4000K	1700 lm	10
<b>0027836</b>	36W/840	36W	2G10	4000K	2800 lm	10





## LYNX<sup>®</sup>-Q



universal



- Flat profile, slim, high output lamps
- Excellent colour rendering - Ra 85/ Class 1B
- 2-pin GR8 cap incorporate starter
- To be used with conventional magnetic gear
- Average rated life 10000 hours



LYNX-Q	C	C1	D	D1	E	F	U
	max.	max.	max.	max.	max.	max.	max.
16W	141	51	15	27,5	138	41	40

## LYNX<sup>®</sup>-Q


Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>LYNX-Q Homelight Deluxe (827)</b>						
0024944	Lynx Q	16W	GR8	2700K	1050 lm	10
<b>LYNX-Q White Deluxe (835)</b>						
0024946	Lynx Q	16W	GR8	3500K	1050 lm	10
<b>LYNX-Q Cool White Deluxe (840)</b>						
0024947	Lynx Q	16W	GR8	4000K	1050 lm	10



## LYNX® -QE



- Flat profile, slim, high output lamps
- Excellent colour rendering - Ra 85/ Class 1B
- 4-pin GR10q cap without starter
- To be used with electronic ballast
- Dimmable with suitable ballast
- Average rated life 10000 hours










Lynx-Q	C max.	C1 max.	D max.	D1 max.	E max.	F max.	U max.
16W	141	51	15	27,5	138	41	40
28W	207	77	24	33,0	205	41	49
38W	207	77	24	33,0	205	41	49


## LYNX® -QE

Code	Description	Watt	Cap	Colour Temp	Luminous Flux	Packing Qty
<b>Lynx-QE Homelight Deluxe (827)</b>						
0024989	Lynx QE	16W	GR10q	2700K	1050 lm	10
0024997	Lynx QE	28W	GR10q	2700K	2050 lm	10
0025001	Lynx QE	38W	GR10q	2700K	2850 lm	10
<b>Lynx-QE White Deluxe (835)</b>						
0024991	Lynx QE	16W	GR10q	3500K	1050 lm	10
0024999	Lynx QE	28W	GR10q	3500K	2050 lm	10
0025003	Lynx QE	38W	GR10q	3500K	2850 lm	10
<b>Lynx-QE Cool White Deluxe (840)</b>						
0024992	Lynx QE	16W	GR10q	4000K	1050 lm	10
0025000	Lynx QE	28W	GR10q	4000K	2050 lm	10
0025004	Lynx QE	38W	GR10q	4000K	2850 lm	10

## SPECTRAL POWER DISTRIBUTION

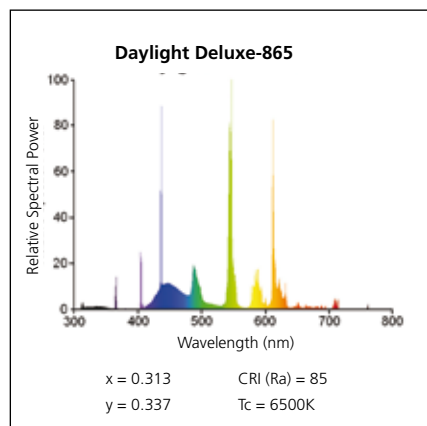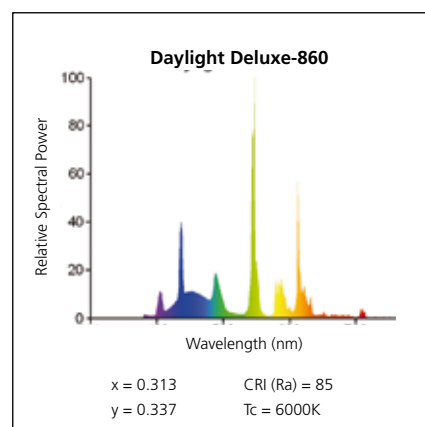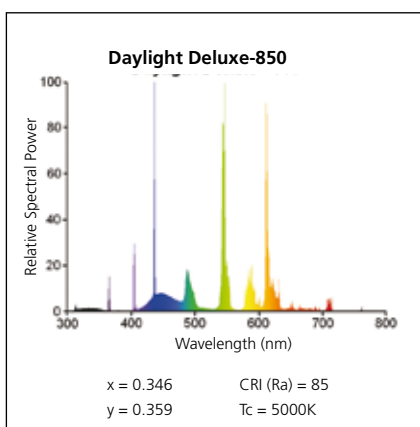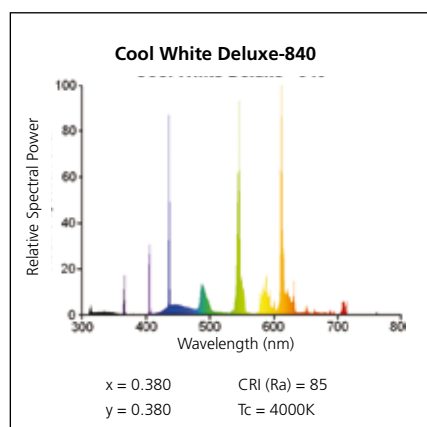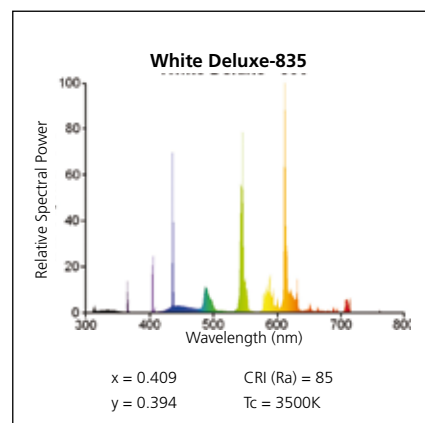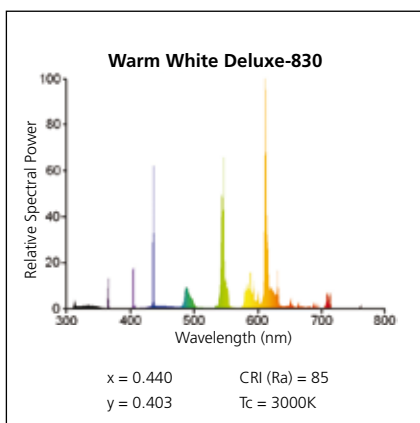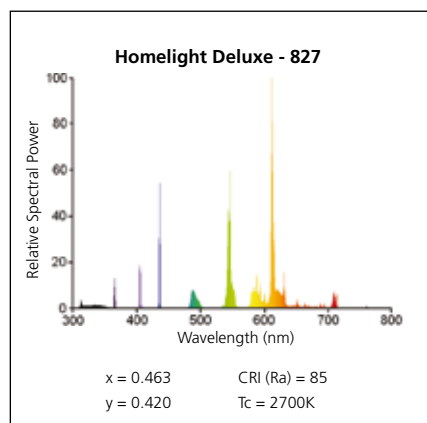


## CIRCUIT DIAGRAMS

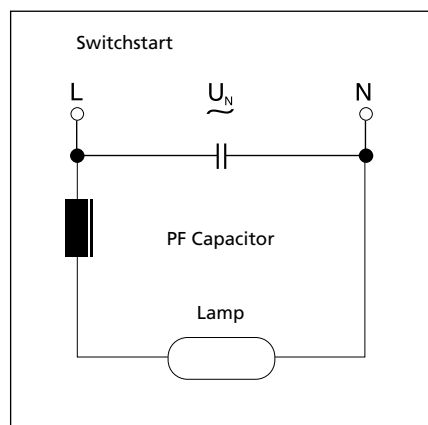

### SWITCHSTART


with conventional ballast  
Lynx-S 5W, 7W, 9W, 11W  
Lynx-D 10W, 13W, 18W, 26W  
Lynx-T 18W, 26W

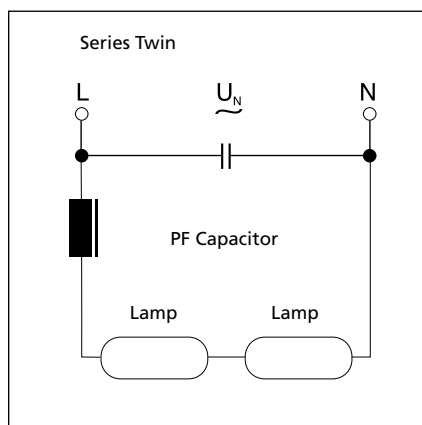

### SERIES TWIN


with conventional ballast  
Lynx-S 5W, 7W, 9W

L = External conductor  $L_1, L_2, L_3$   
N = Median conductor MP  
 $U_N$  = Power supply 230V  
B = Ballast

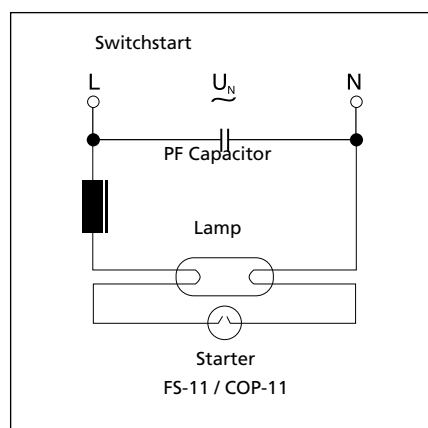


### SWITCHSTART

with conventional ballast and  
FS-11 starter or COP-11 safety starter  
Lynx-L 18W, 24W, 36W

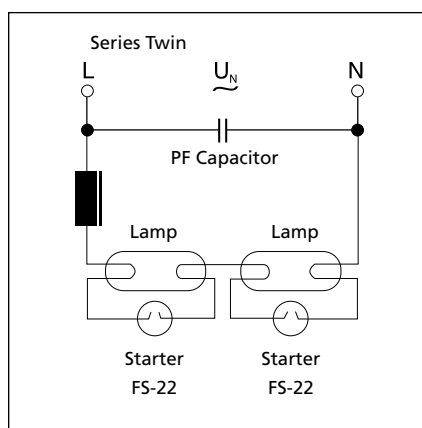

### SERIES TWIN

Series Twin  
with conventional ballast only with  
2 x FS-22 starter  
Lynx-L 18W

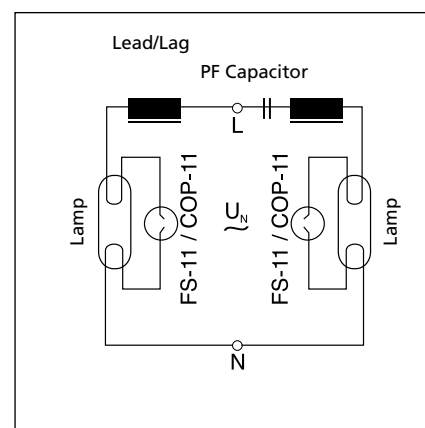

### LEAD/LAG

with conventional ballast with  
FS-11 starter or with  
COP-11 safety starter  
Lynx-L 18W, 24W, 36W



